

sta
AUG 07 1997

ENGINEERING DATA TRANSMITTAL

2. To: (Receiving Organization) DISTRIBUTION		3. From: (Originating Organization) SPECIAL ANALYTICAL SUPPORT 8C530		4. Related EDT No.: N/A	
5. Proj./Prog./Dept./Div.: VAPOR/AS/SPECIAL/ANALYTICAL/ SUPPORT		6. Design Authority/ Design Agent/Cog. Engr.: RICKY MAHON 3-7437		7. Purchase Order No.: N/A	
8. Originator Remarks: SST-241-TY-102. SAMPLING USING THE VAPOR SAMPLING SYSTEM				9. Equip./Component No.: N/A	
				10. System/Bldg./Facility: 622G	
11. Receiver Remarks: 11A. Design Baseline Document? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				12. Major Assm. Dwg. No.: N/A	
				13. Permit/Permit Application No.: N/A	
				14. Required Response Date:	

15. DATA TRANSMITTED					(F)	(G)	(H)	(I)
(A) Item No.	(B) Document/Drawing No.	(C) Sheet No.	(D) Rev. No.	(E) Title or Description of Data Transmitted	Approval Designator	Reason for Transmittal	Originator Disposition	Receiver Disposition
1	HNF-ED-WM-RPT-233 <i>see 50 P117</i>		0	VAPOR AND GAS SAMPLING OF SST-241-TY-102	Q	2		

16. KEY

Approval Designator (F)	Reason for Transmittal (G)	Disposition (H) & (I)
E, S, Q, D or N/A (see WHC-CM-3-5, Sec.12.7)	1. Approval 2. Release 3. Information 4. Review 5. Post-Review 6. Dist. (Receipt Acknow. Required)	1. Approved 2. Approved w/comment 3. Disapproved w/comment 4. Reviewed no/comment 5. Reviewed w/comment 6. Receipt acknowledged

17. SIGNATURE/DISTRIBUTION
(See Approval Designator for required signatures)

(G) Reason	(H) Disp.	(J) Name	(K) Signature	(L) Date	(M) MSIN	(G) Reason	(H) Disp.	(J) Name	(K) Signature	(L) Date	(M) MSIN
		Design Authority									
		Design Agent									
2	1	Cog.Eng. R.D. Mahon	<i>[Signature]</i>	<i>7/30/97</i>							
2	1	Cog. Mgr. L.L. Lockrem	<i>[Signature]</i>	<i>7/30/97</i>							
2	2	QA Mike Barnes	<i>[Signature]</i>	<i>6-10-97</i>							
		Safety									
		Env.									

18. <i>Gloria S. Caprio</i> Signature of EDT Originator <i>for SSC 7/30/97</i>	19. _____ Authorized Representative Date for Receiving Organization	20. <i>L.L. Lockrem</i> Signature <i>7/30/97</i> Date Design Authority/ Cognizant Manager	21. DOE APPROVAL (if required) Ctrl. No. <input type="checkbox"/> Approved <input checked="" type="checkbox"/> Approved w/comments <input type="checkbox"/> Disapproved w/comments
--	--	--	---

VAPOR AND GAS SAMPLING OF SINGLE-SHELL TANK 241-TY-102 USING the in Situ Vapor Sampling System

G.S. Caprio

SGN Eurisys Services Company, Richland, WA 99352
U.S. Department of Energy Contract DE-AC06-96RL13200

EDT/ECN: 614235 UC: 2070
Org Code: 8C530 Charge Code: E62000
B&R Code: EW3120074 Total Pages: 37

Key Words: 241-TY-102, VSS, SUMMA™, TST, SORBENT, TANK

Abstract: THIS DOCUMENT PRESENTS SAMPLING DATA RESULTING FROM THE APRIL 12, 1996 SAMPLING OF SST 241-TY-102

TRADEMARK DISCLAIMER. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.


Printed in the United States of America. To obtain copies of this document, contact: Document Control Services, P.O. Box 950, Mailstop H6-08, Richland WA 99352, Phone (509) 372-2420; Fax (509) 376-4989.

Kara J. Broz

Release Approval

8/5/97

Date

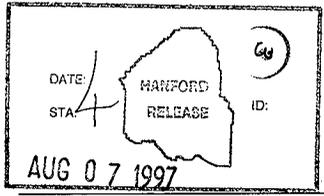


Approved for Public Release

APPROVALS

Document title: Vapor and Gas Sampling of Single-Shell Tank 241-TY-102
Using the Vapor Sampling System

Approved by: _____ Date _____
G. S. Caprio, Field Scientist
Vapor Sampling Project
Special Analytical Studies

Approved by: _____ Date _____
R. D. Mahon, Project Lead
Vapor Sampling Project
Special Analytical Studies

Approved by:  _____ Date 7/17/97
L. E. Lockrem, Manager
Special Analytical Studies

CONTENTS

1.0 SCOPE 1

2.0 SAMPLING EQUIPMENT DESCRIPTION 1

 2.1 VAPOR SAMPLING SYSTEM 1

3.0 SAMPLING EVENT DESCRIPTION 3

 3.1 SPECIFICATIONS 3

 3.2 OPERATIONS AND SAMPLING PERSONNEL 3

 3.3 INDUSTRIAL HYGIENE FIELD RESULTS 3

 3.4 AMBIENT CONDITIONS 3

 3.5 SAMPLE COLLECTION 3

 3.6 FIELD GC/FID RESULTS 4

 3.7 RADIATION SCREENING 4

4.0 SAMPLE CHAIN OF CUSTODY: RECEIPT, STORAGE, AND SHIPMENT 5

5.0 QUALITY ASSURANCE AND CONTROLS 6

 5.1 VAPOR SAMPLING SYSTEM CLEANING 6

 5.2 INSTRUMENT CALIBRATION 7

 5.3 BLANK SAMPLES 8

6.0 ANOMALIES 8

7.0 REFERENCES 8

APPENDICES

SAMPLE LOG SHEETS A-1

AMBIENT CONDITIONS B-1

CHAIN-OF-CUSTODY FORMS C-1

LIST OF TABLES

1. Flow Control Calibration	3
2. TOC Results	6
3. Radionuclide Analysis Results	7
4. Pacific Northwest National Laboratory Samples	8
5. Calibration Data	10

LIST OF TERMS

CGI	Combustible Gas Indicator
COC	Chain Of Custody
DOT	U.S. Department of Transportation
GC/FID	Gas Chromatograph/Flame Ionization Detector
GEA	Gamma Energy Analysis
NH ₃	Ammonia
NO ₂	Nitrogen Dioxide
NO	Nitric Oxide
H ₂ O	Water Vapor
OPC	Offsite Property Control
OVM	Organic Vapor Meter
PNNL	Pacific Northwest National Laboratory
SAS	Special Analytical Studies
SML	Sampling and Mobile Laboratories
SST	Single-Shell Tank
TCP	Tank Characterization Plan
team	Vapor Team
TOC	Total Organic Carbon
TST	Triple Sorbent Trap
YSS	Vapor Sampling System
WHC	Westinghouse Hanford Company

This page intentionally left blank.

VAPOR AND GAS SAMPLING OF SINGLE-SHELL TANK 241-TY-102 USING THE VAPOR SAMPLING SYSTEM

1.0 SCOPE

The Vapor Issue Resolution Program tasked the Vapor Team (the team) to collect representative headspace samples from Hanford Site single-shell tank (SST) 241-TY-102. This document presents sampling data resulting from the April 12, 1996 sampling of SST 241-TY-102. Analytical results will be presented in separate reports issued by the laboratories that supplied and analyzed the sampling media.

2.0 SAMPLING EQUIPMENT DESCRIPTION

2.1 VAPOR SAMPLING SYSTEM

The team, consisting of Sampling and Mobile Laboratories (SML) and Special Analytical Studies (SAS) personnel, used the vapor sampling system (VSS) to collect representative samples of the air, gases, and vapors from the headspace of SST 241-TY-102 with sorbent traps and SUMMA¹ canisters on April 12, 1996. Mahon et al. (1994) describes in detail the VSS, its performance, and its operation.

The VSS comprises a mobile laboratory connected to the vapor head space of the waste tank by stainless steel transfer tubing. A vacuum pump draws sample vapor from the tank headspace through the transfer tubing into the sampling manifold. Electrically activated, pneumatically actuated, valves direct sample flow within the VSS. Instrumentation housed in the mobile laboratory monitors and controls system temperature, monitors absolute and differential system pressure, meters and controls vapor mass flow, and monitors total organic carbon (TOC) content of sample vapor using a gas chromatograph/flame ionization detector (GC/FID).

A key feature of the VSS is its use of heated transfer tubing and a heated sampling manifold. Maintaining the system at an elevated and controlled temperature prevents vapor condensation and reduces vapor adsorption on surfaces exposed to sample vapor. Mahon et al. (1994) describes various tests and observations that indicate the VSS sample transfer efficiency is consistently high.

Highly accurate mass flow controllers control the sample vapor flow rate through the sorbent traps at the sorbent trap station. The controllers FICV-1 through FICV-9 are mounted on top of the sorbent station between the inlet and

¹SUMMA is a registered trademark of Molectrics, Inc., Cleveland, Ohio.

outlet valves of their respective sampling ports. Controllers FICV-10 and FICV-11 are located downstream of the sorbent trap station and the in-line driers, which remove moisture from the sample vapor before it is metered. Errors associated with the mass flow controllers were determined by the Westinghouse Hanford Company (WHC) Standards Laboratory before the SST 241-TY-102 sampling event (see Table 1).

The VSS is equipped with a Hewlett Packard 5890 Series II gas chromatograph (GC) which is equipped with a flame-ionization detector (FID), 1 mL sample loop, 10 port injection valve, 2 meter chromatographic column, programmable oven, and a portable computer loaded with the HP-Chemstation² software providing computer control. The oven is programmed to heat from 50°C to 270°C at a rate of 70°C per minute. Helium is the carrier gas, air and hydrogen the combustion gases, and nitrogen the make-up gas. The GC is plumbed to accept sample from the VSS manifold to the sample loop. After the sample is transferred into the sample loop and reaches equilibrium, the run is initiated by the operator from the computer. HP-Chemstation software activates the 10 port valve which transfers a sample from the sample loop to the HP-5 column. The column is 2m long and has an inside diameter of 0.25mm which is coated with a chemically bonded phenyl methyl silicone layer to minimize sample interference. The sample passes through the column to the FID which generates a TOC signal for that sample. The data is then transmitted to the computer where it is stored for future retrieval and analysis. The GC/FID is configured to confirm sampling system cleanliness, and to quantitatively estimate TOC concentration in ambient air and tank vapor samples in real time.

²HP-CHEMSTATION is a Registered Trademark of the Hewlett Packard Company, Avondale, Pennsylvania.

Table 1. Flow Control Calibration.

Flow-indicating Control valve	Typically used Flow (stdcm ³ /min)	% Change from 647 to Actual	% Change from Datalogger to Actual
1	200	-0.7	-0.85
2	200	0.05	-0.10
3	200	-0.45	-0.60
4	200	0.05	-0.10
5	200	0.55	0.35
6	200	0.25	0.05
7	200	0.4	0.20
8	200	0.25	-1.81
9	50	-0.128	-0.27
10	200	-1.1	-1.20
11	5000	0.332	0.17

The system is multi-point calibrated at the weather station on an as available basis and last performed January 1995. The GC/FID has displayed a high degree of stability over a period of months. For further details, see Section 3.6, Field GC/FID Results.

Sorbent trap samples, pencil-size stainless steel or glass tubes that contain vapor-adsorbing media, are collected at the sorbent trap station of the sampling manifold. The rate and the duration of flow, as specified by the analytical laboratory providing the sample media, determines the total volume of vapor to be passed through the tube. Virtually all the target analytes are then trapped in the tube by the adsorbing media. Analyte concentration in the tank vapor can then be ascertained from the sorbent media analysis knowing the total volume of vapor which passed through the sorbent trap.

SUMMA[™] canisters, stainless steel vessels with their internal surfaces chemically passivated by the SUMMA[™] process to minimize adsorption of gases and vapors, are used to sample tank vapor from the SUMMA[™] sampling station on the sampling manifold. The precleaned and evacuated SUMMA[™] canisters are filled with sample vapor by opening a manually operated valve, which is then shut after pressure equilibration to seal the sample inside. SUMMA[™] canisters allow a 6 liter sample to be transported to an analytical laboratory.

3.0 SAMPLING EVENT DESCRIPTION

3.1 SPECIFICATIONS

The Vapor Issue Resolution Program specifies sampling requirements in WHC-SD-WM-TP-335 Rev 2, *Vapor Sampling and Analysis Plan* (Homi 1996), which also specifies the types and number of samples to be collected, flow rates, and durations. These key sampling parameters are summarized on the sample log sheets in Appendix A. In addition to the sample log sheets, checksheets for each individual sample help ensure correct sampling procedures. The team retains these documents in this sample event's project-specific file, S6-037.

3.2 OPERATIONS AND SAMPLING PERSONNEL

Steve Carter was the Tank Farm Operations person-in-charge. The team members included:

G. S. Caprio, Field Scientist
R. D. Mahon, Vapor Sampling Lead.

The VSS was set up at SST 241-TY-102 on April 11, 1996 and was allowed to warm up overnight. Sampling began shortly after 9:30 a.m. on April 12, 1996, and was completed by 11:30 a.m. the same day.

3.3 INDUSTRIAL HYGIENE FIELD RESULTS

Prior to hooking up to SST 241-TY-102, an industrial hygiene technician field tested tank vapors. The technician purged the instrument/vent header for 5 minutes and then field measured vapor stream contents using a combustible gas indicator (CGI) and an organic vapor meter (OVM). The measurements were verbally reported, LEL 0%, NH_3 <2 ppm, O_2 20.7%, and TOC was not recorded.

3.4 AMBIENT CONDITIONS

The weather the day of the sampling event, April 12, 1996 was cool and overcast with winds from the northwest at about 20 miles per hour. Graphs of ambient temperatures and pressures taken at the Hanford Meteorological Station, which is about 2 miles east of TY-Farm, are provided in Appendix B.

3.5 SAMPLE COLLECTION

The hot-water-jacketed sampling probe was located in Riser 5 of SST 241-TY-102. The probe length, from the sample inlet to the top of the riser flange, was 6.1 meters.

All zones of the VSS were heated to 60 °C during setup at SST 241-TY-102 on April 11, 1996. The team stabilized the VSS temperature zones by 9:30 a.m. on April 12, 1996, and the system was ready to collect samples. Measured according to the VSS operating procedure, the pressure and temperature of SST 241-TY-102 were 988 mbar (741.3 torr) and 13.7 °C, respectively. The sample log sheets (Appendix A) provide a complete chronology of the sample event including start and end times, flow rates, volumes, and specific sample identifiers.

Approximately 23 hours before the first samples were collected, the team began heating the VSS transfer tubing and sampling manifold. During this warmup period, the team began a purge of all vapor transfer tubing and the sampling manifold with ambient air. Prior to sampling tank vapors on April 12, 1996, the team collected two SUMMA[™] canister samples of ambient air, one manually 10 meters upwind of the VSS connection with SST 241-TY-102, and the other using the VSS sampling manifold. The former was collected to establish background levels of trace organic vapors, and the latter was collected to establish the cleanliness of the sampling manifold.

A leak check of the VSS sampling manifold and transfer tubing was performed. The system was evacuated to 289 mbar (216.9 torr) and leakage of ambient air into the system was observed by monitoring system pressure for 15 minutes. Leakage resulted in an increase of 4.8 mbar (3.6 torr) in system pressure during the 15 minute test. Given a system volume of not more than 10 L, this pressure increase corresponds to a leak rate of approximately 11.1 ml/min. This leak rate was then estimated for average SUMMA[™], Triple Sorbent Trap (TST), and sorbent sampling pressures. It was found that for the SUMMA[™] canisters, dilution by ambient air was approximately 0.1%, for TST traps sampled at 100 mL/min was 0.9%, and for sorbent traps the dilution was approximately 0.4%.

The sampling valve was opened and the VSS was purged with sample vapor from SST 241-TY-102 for 30 minutes at a total flow rate of 5.46 L/min. This purge was performed to flush ambient air from the system and saturate the system's active adsorption sites. Because the volume of transfer tubing and the sampling manifold upstream of the sampling devices is estimated to be no more than 10 L, this purge provided about 16.4 air turnovers in the system.

One analytical laboratory provided sample media. Pacific Northwest National Laboratory (PNNL) provided SUMMA[™] canisters, sorbent traps for organic vapors, ammonia (NH₃), NO_x, and water vapor (H₂O), and TST sorbent traps.

3.6 FIELD GC/FID RESULTS

The GC was single point calibrated on the day of sampling using 6.0 ppmC Propane standard by Scott Specialty Gas. The standard is an E.P.A. Protocol Gas that is ± 2% NIST traceable.

Table 2 displays the Field GC/FID results from the sampling of 241-TY-102.

Table 2. TOC Results.

Number of Runs	Description	Average TOC Concentration (ppmC)	% Standard Deviation
3	Propane	6.00	0.86
4	Ambient	3.46	1.07
3	Tank Vapor	3.51	0.79

3.7 RADIATION SCREENING

~~Samples are unconditionally released from the SST farm in accordance with 1995-33300-RSP-03, Release of Vapor Sampling Equipment (WHC 1995c).~~
 Radiological screening results are used to determine (1) if the samples must be shipped as radioactive or nonradioactive in accordance with U.S. Department of Transportation (DOT) regulations and (2) if the samples meet the laboratory acceptance criteria.

The DOT limits for shipping a nonradioactive sample are 2000 combined pCi/g of beta-gamma activity and alpha activity. Samples exceeding these DOT limits may be shipped as radioactive material if the samples do not exceed the following laboratory acceptance criteria:

PNNL: Beta-gamma activity <400 pCi/g of sample media. Alpha activity <100 pCi/g of sample media.

To protect the sampling manifold and sampling devices from radioactive particulates, all sample vapor for the April 12, 1996, SST 241-TY-102 vapor sampling event was drawn through a series of four filters placed upstream of the sampling manifold. These four filters were in place any time tank vapors were flowing through the system. When sampling was complete, the filters were removed and assigned unique sample identifiers. All four filters were submitted to Laboratory 222-S for total alpha, total beta, and gamma energy analysis (GEA). The filter closest to the sampling manifold was analyzed to determine if the samples met DOT shipping criteria and laboratory acceptance criteria. Moisture from the tank vapors was collected in a silica gel trap through one of the sorbent station ports and analyzed for tritiated water. SST 241-TY-102 filter and silica gel analysis results are shown in Table 3. The vapor team scientists use the activity results in Table 3 to calculate pCi/g of sample media. The team maintains this information in the project-specific file. The results in Table 3 indicate that the samples collected from SST 241-TY-102 met the laboratory acceptance criteria and the DOT definition of a nonradioactive shipment.

Table 3. Radionuclide Analysis Results.

Filter	Sample Identifier	Activity Results ^a (pCi/sample)	Activity ^b (pCi/L of tank gas)
Upstream filter (box)	S6037-A21.OU1	Total Alpha = 548 Total Beta = 699 GEA = <detectable	= 1.99 = 2.54 = <detectable
Downstream filter (box)	S6037-A22.OD1	Total Alpha = <0.485 Total Beta = 2.6 GEA = <detectable	= <detectable = 0.01 = <detectable
Upstream filter (VSS)	S6037-A23.OU2	Total Alpha = <0.485 Total Beta = 6.13 GEA = <detectable	= <detectable = 0.02 = <detectable
Downstream filter (VSS)	S6037-A24.OD2	Total Alpha = <0.485 Total Beta = <1.99 GEA = <detectable	= <detectable = <detectable = <detectable
Tritium trap	S6037-A03.OT1	Total activity = <9.33	= <9.33 ^c

NOTES:

The samples are nonradioactive. These results were evaluated against laboratory acceptance criteria and DOT limits.

^aAll less than (<) values represent the minimum detection limits at Laboratory 222-S.

^bNumbers based on an approximation of the total volume of tank vapor through the filters. Appendix A and the sample checksheets were used to estimate a total flow through the VSS of 275.2 L.

^cNumber is calculated using a total volume of 1 L passing through the tritium trap.

4.0 SAMPLE CHAIN OF CUSTODY: RECEIPT, STORAGE, AND SHIPMENT

All sorbent trains, TSTs, and SUMMA™ canisters received from PNNL are kept in a custody locked storage area maintained by SML. Sorbent trains, tubes and traps were maintained at 4 ± 2 °C in a refrigeration unit. SUMMA™ canisters were stored in the same locked storage area, but were not refrigerated. The sample media was picked up from PNNL by SML and transported in a government vehicle to a custody locked storage area.

After sampling, the PNNL sorbent tubes, TSTs, and SUMMA™ canisters were transported by government vehicle directly to PNNL and delivered to J. A. Edwards on April 17, 1996.

Table 4 lists the sample identifiers, sample types, and COC form numbers for all PNNL samples.

Table 4. Pacific Northwest National Laboratory Samples.

Sample Identifier	Sample Type	COC Number
S6037-A01.236	Ambient upwind SUMMA™	100066
S6037-A02.239	Ambient SUMMA™ (VSS)	100066
S6037-A04.240	SUMMA™	100066
S6037-A05.249	SUMMA™	100066
S6037-A06.251	SUMMA™	100066
S6037-A07.S49	NH ₃ /NO _x /H ₂ O sorbent	100068
S6037-A08.S50	NH ₃ /NO _x /H ₂ O sorbent	100068
S6037-A09.S51	NH ₃ /NO _x /H ₂ O sorbent	100068
S6037-A10.S52	NH ₃ /NO _x /H ₂ O sorbent	100068
S6037-A15.S53	NH ₃ /NO _x /H ₂ O field blank	100068
S6037-A16.S54	NH ₃ /NO _x /H ₂ O field blank	100068
S6037-A11.921	TST	100067
S6037-A12.922	TST	100067
S6037-A13.923	TST	100067
S6037-A14.925	TST	100067
S6037-A17.926	TST Field Blank	100067
S6037-A18.927	TST Field Blank	100067
S6037-A19.928	TST Trip Blank	100067
S6037-A20.929	TST Trip Blank	100067

From the time that samples are received by SML until they are shipped back to the analytical laboratory, all COCs are maintained by SML in accordance with WHC-IP-1127-1.3, *Chain-of-Custody/Special Analysis Request for RCRA and CERCLA Protocol Samples* (WHC 1995a). Copies of the completed COC forms for this sampling event are included in Appendix C.

5.0 QUALITY ASSURANCE AND CONTROLS

5.1 VAPOR SAMPLING SYSTEM CLEANING

Immediately prior to sampling of SST 241-TY-102, the VSS manifold and vapor sample transfer tubing was heated to 60 °C and ambient air was purged through the system for 1367 minutes. Also, all pertinent system valves were actuated to release any contaminants that may have collected in the VSS valves themselves. After this purge an ambient air sample was drawn through the VSS manifold and a GC/FID run was initiated. No significant level of contaminants was detected. A second ambient air GC/FID run confirmed that the VSS manifold and transfer tubing was free of organic remnant residue down to ambient levels. A SUMMA[™] canister ambient air sample was then collected to confirm by laboratory analysis that the VSS sampling manifold was free of trace organic contaminants (or to determine which contaminants were present and at what concentration), as discussed in Section 3.5. For further details, refer to Appendix E of WHC-IP-1127-4.10 (WHC 1995b) and the project-specific file located with the team.

5.2 INSTRUMENT CALIBRATION

Instruments located in the VSS are calibrated on an annual basis at the WHC Standards Laboratory. VSS instrumentation calibration data, maintained in files by the team, are summarized in Table 5. According to the calibration schedule shown in Table 5, all instrumentation was within its calibration period during the SST 241-TY-102 sampling event.

Due to calibration discrepancies, the mass flow measurements for this sampling event may have an error of 6% to 14%. A detailed description of this discrepancy can be found in internal memo 75820-96-028.

Table 5. Calibration Data.

Element	Calibration Date	Expiration Date	WHC Standards Laboratory Code
FICV-1	5/08/95	5/08/96	518-28-03-012
FICV-2	5/08/95	5/08/96	518-28-03-008
FICV-3	5/08/95	5/08/96	518-28-03-004
FICV-4	5/08/95	5/08/96	518-28-03-006
FICV-5	5/08/95	5/08/96	518-28-03-011
FICV-6	5/08/95	5/08/96	518-28-03-009
FICV-7	5/08/95	5/08/96	518-28-03-014
FICV-8	5/08/95	5/08/96	518-28-03-013
FICV-9	5/08/95	5/08/96	518-28-03-007
FICV-10	5/08/95	5/08/96	518-28-03-010
FICV-11	5/08/95	5/08/96	518-28-03-005
PE-1	5/04/95	5/04/96	518-80-02-005
PE-2	5/04/95	5/04/96	518-80-02-006
PE-3	5/04/95	5/04/96	518-80-02-008
PE-4	5/04/95	5/04/96	518-80-02-007
PD-1	5/04/95	5/04/96	518-80-02-004
PD-2	5/04/95	5/04/96	518-80-02-003
Temperature Control System	08/25/95	08/25/96	804-67-74-009

5.3 BLANK SAMPLES

Trip blanks are samples that accompany the sample media from the point of generation through sample analysis. They are transported to the field with the sample collection media but remain unopened during the sampling event. Analysis of trip blanks is used to assess cross-contamination of sample media during field transport and storage.

Field blanks are sampling devices similar to trip blanks. They are prepared and handled in the same manner as the sampling media, but no tank vapors are drawn through them.

Spiked blanks are prepared as regular sampling media but also contain a known amount of special analyte. Tank vapors are drawn through these blanks and they are handled and analyzed just like any other sample. Analysis of the spiked blanks is used to evaluate potential sample loss during shipment or storage.

Ambient blanks are samples of ambient air collected at the sampling location. Analysis of ambient blanks is used to assess contamination that may be present in the atmosphere or in the transfer tubing or sampling manifold of the VSS immediately prior to sampling operations.

Table 4 lists sample blanks used during the sampling of SST 241-TY-102.

6.0 ANOMALIES

All samples were collected in accordance with the TCP and WHC-IP-1127-4.5, *Collection of SUMMA Canisters and Sorbent Tube Samples Using the Vapor Sampling System* (1995b). There were no anomalies during the VSS sampling event.

7.0 REFERENCES

- 49 CFR 100-177, 1992, "Transportation," *Code of Federal Regulations*, as amended.
- Homi, C. S., 1996, *Vapor Sampling and Analysis Plan*, WHC-SD-WM-TP-335 Rev. 1D, Westinghouse Hanford Company, Richland, Washington.
- Mahon, R. D., C. M. Jones, and M. S. Story, 1994 (draft), *Evaluation of the Capabilities and Use of the Vapor Sampling System for Tank Headspace Sampling and Characterization*, SD-WM-RPT-094, Westinghouse Hanford Company, Richland, Washington.
-
- Trible, T. C., Viswanath, R. S., 1996c, *Recommendation concerning the ISVS/VSS comparison study data with respect to calibration errors in Mass flow monitors and controllers*, (internal memo 75820-96-028 to L.D. Pennington, August 28), Westinghouse Hanford Company, Richland, Washington.
- WHC, 1995a, *Chain-of-Custody/Special Analysis Request for RCRA and CERCLA Protocol Samples*, Procedure WHC-IP-1127-1.3, Rev. 1, Westinghouse Hanford Company, Richland, Washington.
- WHC, 1995b, *Collection of SUMMA Canisters and Sorbent Tube Samples Using the Vapor Sampling System (VSS)*, Procedure WHC-IP-1127-4.5, Westinghouse Hanford Company, Richland, Washington.
- WHC, 1995c, *Release of Vapor Sampling Equipment*, Procedure 1995-33300-RSP-03, Westinghouse Hanford Company, Richland, Washington.

This page intentionally left blank.

APPENDIX A
SAMPLE LOG SHEETS

This page intentionally left blank.

VSS Sampling of
TY-102

Set up VSS (Section A)(Temperature set point = 60°C)

Ensure HEPA filters are installed

Ensure connection to sample probe

System status check sheet. (Verify zones are to temp)

Tank Temperature 13.7 C

GC Standard Runs

GC Ambient Air Runs through port 10

VSS Personnel: Glenn Caprio and Rick Mahon

Date: 4/12/96

Trailer Personnel: None

WHC Sample ID	ORNL/PNL Sample ID	Port Valve #	Description	Desired Flow Rate SCCM	Desired Duration (min.)	Desired Total Flow SCCM	Actual Flow Rate SCCM	Actual Start Time	Actual End Time	Actual Total Time (min.)	Actual Total Flow Liters
Purge with ambient air for 30 min.											
S6037- A01. 236	236	Upwind	AMBIENT #1	5500	30	165000	5500	4/11/96 1113	4/12/96 0857	1367	
GC Run #1 Ambient air/Cleanliness check											
S6037- A02. 239	239	15	AMBIENT #2		1			0918	0925	1	
GC RUN#2 Ambient air											
LEAK CHECK(APPENDIX A) Leak Rate: 14.4 Torr/Hr											
Purge with tank air for 30 min											
				5500	30	165000	5500	1005	1035	30	165.00
Measure tank pressure											
				PE-1 = 741.3							
GCRUN #3 (Tank run #1)											
				200	5	1000	200.00	1044	1049	5	1.00
S6037- A03. 0T1	S96VV0038	5	Tritium Trap								
S6037- A04. 240	240	11	SUMMA #3								
S6037- A05. 249	249	13	SUMMA #4								
S6037- A06. 251	251	15	SUMMA #5								
GCRUN #4 (Tank run # 2)											
				1106							

TY102.XLS 4/17/96 7:27 AM

VSS Sampling of
TY-102

WHC Sample ID	ORNL/PNL Sample ID	Port Valve #	Description	Desired Flow Rate SCCM	Desired Duration (min.)	Desired Total Flow SCCM	Actual Flow Rate SCCM	Actual Start Time	Actual End Time	Actual Total Time (min.)	Actual Total Flow Liters
S6037- A07 S49	#S49	1	NH3/H2O (#1)	200	10	2000	200.00	1110	1120	10	2.00
S6037- A08 S50	#S50	2	NH3/H2O (#2)	200	10	2000	200.00	1110	1120	10	2.00
S6037- A09 S51	#S51	3	NH3/H2O (#3)	200	10	2000	200.00	1110	1120	10	2.00
S6037- A10 S52	#S52	4	NH3/H2O (#4)	200	10	2000	200.00	1110	1120	10	2.00
S6037- A11 921	#921	5	TST #1	100	2	200	100.00	1110	1112	2	0.20
S6037- A12 922	#922	6	TST #2	100	2	200	100.00	1110	1112	2	0.20
S6037- A13 923	#923	7	TST #3	100	2	200	100.00	1110	1112	2	0.20
S6037- A14 925	#925	8	TST #4	100	2	200	100.00	1110	1112	2	0.20
S6037- A17 926	#926		TST FIELD BLANK #1					1117	1118	1	
S6037- A18 927	#927		TST FIELD BLANK #2					1117	1118	1	
S6037- A15 S53	#S53		NH3/NOx/H2O FIELD BLANK #1					1126	1127	1	
S6037- A16 S54	#S54		NH3/NOx/H2O FIELD BLANK #2					1126	1127	1	
OCRUN #5 (Tank run #3)								1123			
TOTAL TANK GAS USED DURING SAMPLING RUNS											27.80

VSS Sampling of
TY-102

WHC Sample ID	ORNL/PNL Sample ID	Port Valve #	Description	Desired Flow Rate (min.)	Desired Duration (min.)	Desired Total Flow SCCM	Actual Flow Rate SCCM	Actual Start Time	Actual End Time	Actual Total Time (min.)	Actual Total Flow Liters
S6037- A21 OU1	S96VV0034		Upstream HEPA(box)								
S6037- A22 OD1	S96VV0035		Downstream HEPA(box)								
S6037 A23 OU2	S96VV0036		Upstream HEPA(VSS)								
S6037- A24 OD2	S96VV0037		Downstream HEPA (VSS)								

Trip Blanks (DO NOT EXPOSE)

S6037- A19 928	TST#928		TST TRIP #1								
S6037- A20 929	TST#929		TST TRIP #2								

TY-102
TOTAL TANK VAPOR USED


	NUMBER OF EVENTS	TIME IN MINUTES	VOLUME IN SCCM	TOTAL VOLUME, LITERS
LEAK CHECKS	1	15	5600	5.60
TANK PURGE PUMP DOWNS	3	1	5600	16.80
TANK PURGE TIME (From Spreadsheet)	1	30	5500	165.00
GC PURGES	3	2	5000	30.00
SUMMA PURGES	3	2	5000	30.00
ALL SAMPLES COLLECTED				27.80
TOTAL FOR TANK SAMPLING RUN				275.20

This page intentionally left blank.

APPENDIX B
AMBIENT CONDITIONS

This page intentionally left blank.

WEATHER DURING VSS SAMPLING OF 241-TY-102

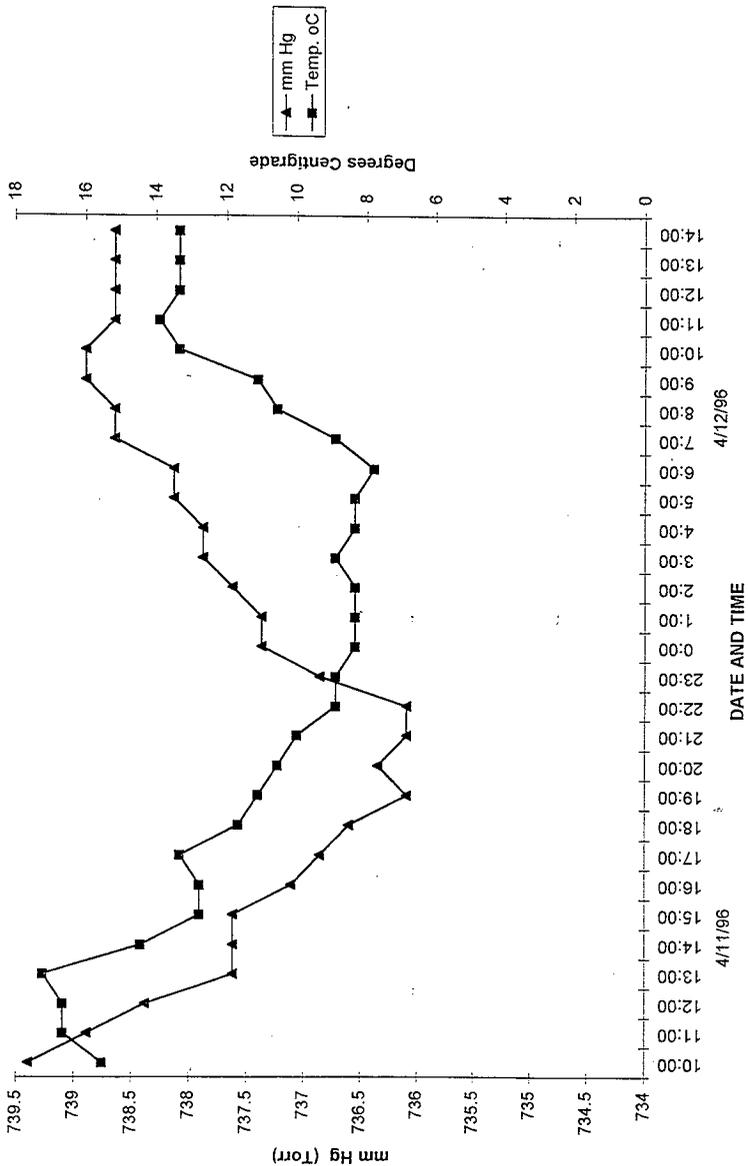

This page intentionally left blank.

APPENDIX C
CHAIN-OF-CUSTODY FORMS

This page intentionally left blank.

Battelle Pacific National Northwest Lab	CHAIN OF CUSTODY	WHC 100066
--	-------------------------	-------------------

Custody Form Initiator	J. A. Edwards - PNNL	Telephone (509) 373-0141 Page 85-3009 / FAX 376-0418
Company Contact	R. D. Mahon - WHC	Telephone (509) 373-2891 Page 85-9656 / FAX 373-3793
Project Designation/Sampling Locations	200 West Tank Farm 241-T-Y-102 Tank Vapor Sample SAF S6037 (VSS Truck)	Collection date 04 - 12 - 96 Preparation date 04 - 08 - 96
Ice Chest No.		Field Logbook No. WHC- <u>N-647-10</u>
Bill of Lading/Airbill No.	N/A	Offsite Property No. N/A
Method of Shipment	Government Truck	
Shipped to	PNNL	
Possible Sample Hazards/Remarks	Unknown at time of sampling	

Sample Identification

S6037 - A01 . 236	Collect Ambient Air Sample SUMMA #1	Upwind of Tank
S6037 - A02 . 239	Collect Ambient Air Sample SUMMA #2	Through VSS
S6037 - A04 . 240	Collect SUMMA #3	
S6037 - A05 . 249	Collect SUMMA #4	
S6037 - A06 . 251	Collect SUMMA #5	

	[] Field Transfer of Custody		[X] Chain of Possession		(Sign and Print Names)		
	Relinquished By	Date	Time	Received By	Date	Time	
	J.A. Edwards / J.R. Edwards	04-10-96	1445	J.A. Edwards / J.R. Edwards	04-10-96	1445	
TBL 4-11-96	J.A. Edwards / J.R. Edwards	4-11-96	1207	J.A. Edwards / J.R. Edwards	4-11-96	1207	
	J.A. Edwards / J.R. Edwards	4-17-96	1350	J.A. Edwards / J.R. Edwards	4-17-96	1350	

Final Sample Disposition

Comments:

- | | | |
|------------------------------------|--------------------|-----------|
| PNNL (only) Checklist | Pick-up / Delivery | Comments: |
| ◊ Media labeled and checked? | Y/N | |
| ◊ Letter of instruction? | Y/N | |
| ◊ Media in good condition? | Y/N | |
| ◊ COC info/signatures complete? | Y/N | |
| ◊ Rad release stickers on samples? | Y/N | |
| ◊ Activity report from 2225? | Y/N | |
| ◊ RSR/copy? (a ≤100/B ≤400 pC/g) | Y/N | |
| ◊ COC copy for LRB, RIDs filed? | Y/N | |

POC POC

(Revised 11/30/95 PNNL)

Battelle Pacific National Northwest Lab	CHAIN OF CUSTODY	WHC 100068
--	-------------------------	-------------------

Custody Form Initiator	J. A. Edwards - PNNL	Telephone (509) 373-0141 Page 85-3009 / FAX 376-0418
Company Contact	R. D. Mahon - WHC	Telephone (509) 373-7437 Page 85-9656 / FAX 373-3793
Project Designation/Sampling Locations	200 West Tank Farm 241-TY-102 Tank Vapor Sample SAF S6037 VSS	Collection date 04 - 12 - 96 Preparation date 04 - 08 - 96
Ice Chest No.		Field Logbook No. WHC- <u>N-697 10</u>
Bill of Lading/Airbill No.	N/A	Offsite Property No. N/A
Method of Shipment	Government Truck	
Shipped to	PNNL	
Possible Sample Hazards/Remarks	Unknown at time of sampling	

Sample Identification

S6037 - A07 . S49	Collect NH ₃ /NO _x /H ₂ O Sorbent Trap
S6037 - A08 . S50	Collect NH ₃ /NO _x /H ₂ O Sorbent Trap
S6037 - A09 . S51	Collect NH ₃ /NO _x /H ₂ O Sorbent Trap
S6037 - A10 . S52	Collect NH ₃ /NO _x /H ₂ O Sorbent Trap
S6037 - A15 . S53	Open, close and store NH ₃ /NO _x /H ₂ O field blank #1
S6037 - A16 . S54	Open, close and store NH ₃ /NO _x /H ₂ O field blank #2

[] Field Transfer of Custody		[X] Chain of Possession		(Sign and Print Names)		
Relinquished By	Date	Time	Received By	Date	Time	
G W Dennis <i>(Signature)</i>	04 - 10 - 96	1345	J L Julva <i>(Signature)</i>	04 - 10 - 96	1345	
J L Julva (Signature)	04 - 11 - 96	1207	T. B. UH (Signature)	04 - 11 - 96	1207	
T. B. UH (Signature)	4 - 17 - 96	1350	J A Edwards (Signature)	4 - 17 - 96	1350	

Final Sample Disposition

Comments:

- | | | |
|--|--|---|
| PNNL (only) Checklist
◊ Media labeled and checked?
◊ Letter of instruction?
◊ Media in good condition?
◊ COC info/signatures complete?
◊ Rad release stickers on samples?
◊ Activity report from 222S?
◊ RSR/copy? (a ≤100/B ≤400 pCi/g)
◊ COC copy for LRB, RIDS filed? | Pick-up / Delivery
◊/N
◊/N
◊/N
◊/N
◊/N
◊/N
◊/N
◊/N
POC <i>(Signature)</i> | Comments:

POC <i>(Signature)</i> |
|--|--|---|

(Revised 11/30/95 PNNL)

Battelle Pacific Northwest National Laboratory **CHAIN OF CUSTODY** **WHC 100067**

Custody Form Initiator J. A. Edwards - PNNL Telephone (509) 373-0141
 Page 85-3009 / FAX 376-0418

Company Contact R. D. Mahon - WHC Telephone (509) 373-2891
 Page 85-3152 / FAX 373-3793

Project Designation/Sampling Locations 200 East Tank Farm Collection date 04 - 12 - 96
 241-TY-102 Tank Vapor Sample SAF S6037 Preparation date 04 - 08 - 96
 (VSS Truck)

Ice Chest No. Field Logbook No. WHC-N-64710

Method of Shipment Government Truck

Shipped to PNNL

Possible Sample Hazards/Remarks: Unknown at time of sampling

Sample Identification

S6037 - A11 . 921 TST(Triple Sorbant Tube) Sample #1
 S6037 - A12 . 922 TST Sample #2
 S6037 - A13 . 923 TST Sample #3
 S6037 - A14 . 925 TST Sample #4

S6037 - A17 . 926 TST Field Blank #1 Open in VSS Truck
 S6037 - A18 . 927 TST Field Blank #2 Open in VSS Truck

S6037 - A19 . 928 TST Trip Blank #1
 S6037 - A20 . 929 TST Trip Blank #2

[] Field Transfer of Custody		[X] Chain of Possession		(Sign and Print Names)			
Relinquished By	Date	Time	Received By	Date	Time		
J.L. Julia	04-10-96	0930	J.A. Edwards	04-10-96	0930		
J.A. Edwards	04-10-96	1345	J.L. Julia	04-10-96	1345		
J.L. Julia	4-11-96	1207	J.A. Edwards	4-11-96	1207		
J.A. Edwards	4-17-96	1350	J.L. Julia	4-17-96	1350		

Final Sample Disposition

Comments:

- PNNL (only) Checklist
- ◊ Media labeled and checked? Y / N
 - ◊ Media in good condition? Y / N
 - ◊ COC info/signatures complete? Y / N
 - ◊ Sorbents shipped on ice? (<5°C) Y / N
 - ◊ Hi/Lo thermometer - Keep upright! Y / N
 - ◊ Hi/Lo thermometer Y / N
 - ◊ Rad release stickers on samples? Y / N
 - ◊ Activity report from 2225? Y / N
 - ◊ COC copy for LRB, RIDS filed? Y / N
- POC POC
- Cooler Temperature Status #6
- Hi _____ °C / Lo _____ °C (pick up at PNNL to WHC) |
 Hi _____ °C / Lo _____ °C (delivery at WHC from PNNL) |
 Hi _____ °C / Lo _____ °C (at return to PNNL from WHC) |
 Hi +6 °C / Lo -24 °C (at delivery from WHC to PNNL) |

(Revised 04/10/96 PNNL)

CHAIN OF CUSTODY/SAMPLE ANALYSIS REQUEST

Westinghouse Hanford Company		COCH /00121/	
Collector	R.D. Mahon	ICL No.	MSIN
SAF Number	S6037	373-743	373-74
Project Title	Vapor Sampling	Purchase Order/Charge Code	53-27
Shipped To (Lab)	222 S 603	Ice Chest#	Temp
Protocol	NONE	Bill of Lading/AM Bill No.	N/A
		Offsite Property No.	N/A

Sample No.	Lab. ID	A	Date	Time	No/Type Container	Sample Analysis	Preservative
S6037-001	S78WV-003H	X	12/18/16	1250	(1) Filter	AT/TB/6EA	N/A
S6037-001	S78WV-003S	X	12/18/16	1255	(1) Filter	AT/TB/6EA	N/A
S6037-002	S78WV-003L	X	12/18/16	1250	(1) Filter	AT/TB/6EA	N/A
S6037-002	S78WV-003T	X	12/18/16	1250	(1) Filter	AT/TB/6EA	N/A
S6037-001	S78WV-003P	X	12/18/16	1250	(1) In-line filter	TOTAL activity	N/A
					()		
					()		
					()		
					()		
					()		
					()		

COPY

POSSIBLE SAMPLE HAZARDS/REMARKS List all known wastes.		SPECIAL INSTRUCTIONS Hold Time Please refer to report to Rick Mahon at 373-7076 once initial report requested are completed. The date and time of each analysis should be included in the report. T.A.M.B.S.	
Relinquished By	Print Rick Mahon	Received By	Print N. LAPLIERE
Relinquished By	Signature Rick Mahon	Received By	Signature N. LAPLIERE
Relinquished By	Date/Time 12/18/16 1255	Received By	Date/Time 4-12-20
Relinquished By	Date/Time	Received By	Date/Time
Relinquished By	Date/Time	Received By	Date/Time

- Matrix*
- | | | | |
|----|----------|----|--------------|
| \$ | Soil | DS | Drum Solids |
| SE | Sediment | DL | Drum Liquids |
| SO | Solid | T | Trace |
| SL | Sloge | L | Liquid |
| W | Water | V | Vegetation |
| O | Oil | X | Other |
| A | Air | | |

DISTRIBUTION SHEET

To Distribution	From Special Analytical Support, Numatec Hanford	Page 1 of 1
		Date 8/7/97
Project Title/Work Order VAPOR AND GAS SAMPLING USING THE IN SITU VAPOR SAMPLING SYSTEM		EDT No. <i>6014235</i>
		ECN No.

Name	MSIN	Text With All Attach.	Text Only	Attach./ Appendix Only	EDT/ECN Only
<u>Lockheed Martin Hanford Company</u>					
L. L. Buckley	R2-12	X			
<u>Lockheed Martin Services, Inc.</u>					
Central Files	A3-88	X			
<u>SGN Eurisys Services Corporation</u>					
E. S. Mast	S3-90	X			
<u>PNNL</u>					
J. L. Huckaby	K6-80	X			