

stat
 AUG 07 1997

ENGINEERING DATA TRANSMITTAL

2. To: (Receiving Organization) DISTRIBUTION		3. From: (Originating Organization) SPECIAL ANALYTICAL SUPPORT 8C530		4. Related EDT No.: N/A	
5. Proj./Prog./Dept./Div.: VAPOR/AS/SPECIAL/ANALYTICAL/ SUPPORT		6. Design Authority/ Design Agent/Cog. Engr.: RICKY MAHON 3-7437		7. Purchase Order No.: N/A	
8. Originator Remarks: SST-241-S-102 SAMPLING USING THE VAPOR SAMPLING SYSTEM				9. Equip./Component No.: N/A	
				10. System/Bldg./Facility: 622G	
11. Receiver Remarks: 11A. Design Baseline Document? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				12. Major Assm. Dwg. No.: N/A	
				13. Permit/Permit Application No.: N/A	
				14. Required Response Date:	

15. DATA TRANSMITTED					(F)	(G)	(H)	(I)
(A) Item No.	(B) Document/Drawing No.	(C) Sheet No.	(D) Rev. No.	(E) Title or Description of Data Transmitted	Approval Designator	Reason for Transmittal	Originator Disposition	Receiver Disposition
1	HNF-SD-WM-RPT-291		0	VAPOR AND GAS SAMPLING OF SST-241-S-102 #5	Q	2		

16. KEY

Approval Designator (F)	Reason for Transmittal (G)	Disposition (H) & (I)
E, S, Q, D or N/A (see WHC-CM-3-5, Sec. 12.7)	1. Approval 2. Release 3. Information 4. Review 5. Post-Review 6. Dist. (Receipt Acknow. Required)	1. Approved 2. Approved w/comment 3. Disapproved w/comment 4. Reviewed no/comment 5. Reviewed w/comment 6. Receipt acknowledged

17. SIGNATURE/DISTRIBUTION
 (See Approval Designator for required signatures)

(G) Reason	(H) Disp.	(J) Name	(K) Signature	(L) Date	(M) MSIN	(G) Reason	(H) Disp.	(J) Name	(K) Signature	(L) Date	(M) MSIN
		Design Authority									
		Design Agent									
2	/	Cog. Eng. R.D. Mahon	<i>[Signature]</i>	7/30/97							
2	/	Cog. Mgr. L.L. Lockrem	<i>[Signature]</i>	7/10/97							
2	/	QA Mike Barnes	<i>[Signature]</i>								
		Safety									
		Env.									

18. Glenn S. Caprio Signature of EDT Originator <i>[Signature]</i> CSC 7/30/97 Date	19. Authorized Representative Date for Receiving Organization	20. L.L. Lockrem Design Authority/ Cognizant Manager <i>[Signature]</i> 7/10/97 Date	21. DOE APPROVAL (if required) Ctrl. No. <input type="checkbox"/> Approved <input type="checkbox"/> Approved w/comments <input type="checkbox"/> Disapproved w/comments
---	---	---	---

VAPOR AND GAS SAMPLING OF SINGLE-SHELL TANK 241-S-102 USING the in Situ Vapor Sampling System

G.S. Caprio

SGN Eurisys Services Company, Richland, WA 99352
U.S. Department of Energy Contract DE-AC06-96RL13200

EDT/ECN: 621405 UC: 2070
Org Code: 8C530 Charge Code: E62000
B&R Code: EW3120074 Total Pages: 31

Key Words: 241-S-102, VSS, SUMMA™, TST, SORBENT, TANK


Abstract: THIS DOCUMENT PRESENTS SAMPLING DATA RESULTING FROM THE FEBRUARY 11, 1997 SAMPLING OF SST 241-S-102(*5)

TRADEMARK DISCLAIMER. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

Printed in the United States of America. To obtain copies of this document, contact: Document Control Services, P.O. Box 950, Mailstop H6-08, Richland WA 99352, Phone (509) 372-2420; Fax (509) 376-4989.

Kara J. Brea
Release Approval

8/5/97
Date

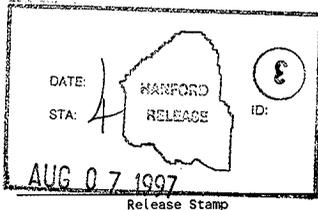

Approved for Public Release

APPROVALS

Document title: Vapor and Gas Sampling of Single-Shell Tank 241-S-102
(#5) Using the Vapor Sampling System

Approved by: _____ Date _____
G. S. Caprio, Field Scientist
Vapor Sampling Project
Special Analytical Studies

Approved by: _____ Date _____
R. D. Mahon, Project Lead
Vapor Sampling Project
Special Analytical Studies

Approved by: *CSM* for L.L. Lockrem _____ Date 07/17/97
L. L. Lockrem, Manager
Special Analytical Studies

CONTENTS

1.0	SCOPE	1
2.0	SAMPLING EQUIPMENT DESCRIPTION	1
2.1	VAPOR SAMPLING SYSTEM	1
3.0	SAMPLING EVENT DESCRIPTION	2
3.1	SPECIFICATIONS	2
3.2	OPERATIONS AND SAMPLING PERSONNEL	2
3.3	INDUSTRIAL HYGIENE FIELD RESULTS	3
3.4	AMBIENT CONDITIONS	3
3.5	SAMPLE COLLECTION	3
3.6	FIELD GC/FID RESULTS	4
3.7	RADIATION SCREENING	4
4.0	SAMPLE CHAIN OF CUSTODY: RECEIPT, STORAGE, AND SHIPMENT	5
5.0	QUALITY ASSURANCE AND CONTROLS	6
5.1	VAPOR SAMPLING SYSTEM CLEANING	6
	6
5.3	BLANK SAMPLES	7
6.0	ANOMALIES	8
7.0	REFERENCES	8

APPENDICES

SAMPLE LOG SHEETS	A-1
AMBIENT CONDITIONS	B-1
CHAIN-OF-CUSTODY FORMS	C-1

LIST OF TABLES

1. Radionuclide Analysis Results.	5
2. Pacific Northwest National Laboratory Samples	6
3. Calibration Data	7

LIST OF TERMS

CGI	Combustible Gas Indicator
COC	Chain Of Custody
DOT	U.S. Department of Transportation
GC/FID	Gas Chromatograph/Flame Ionization Detector
GEA	Gamma Energy Analysis
ISVS	In Situ Vapor Sampling System
NH ₃	Ammonia
H ₂ O	Water Vapor
OPC	Offsite Property Control
OVN	Organic Vapor Meter
PNNL	Pacific Northwest National Laboratory
SAS	Special Analytical Studies
SML	Sampling and Mobile Laboratories
SST	Single-Shell Tank
TCP	Tank Characterization Plan
team	Vapor Team
TOC	Total Organic Carbon
TST	Triple Sorbent Trap
VSS	Vapor Sampling System
WHC	Westinghouse Hanford Company

This page intentionally left blank.

VAPOR AND GAS SAMPLING OF SINGLE-SHELL TANK 241-S-102 USING THE VAPOR SAMPLING SYSTEM

1.0 SCOPE

The Vapor Issue Resolution Program tasked the Vapor Team (the team) to collect representative headspace samples from Hanford Site single-shell tank (SST) 241-S-102. This document presents sampling data resulting from the February 11, 1997 sampling of SST 241-S-102. Analytical results will be presented in separate reports issued by the Pacific Northwest National Laboratory which supplied and analyzed the sample media.

This is the last in a series of temporal sampling events on SST 241-S-102. The strategy of temporal sampling is to measure the compositional changes of the waste tank headspace as related to seasonal effects and gradual changes of waste chemistry.

2.0 SAMPLING EQUIPMENT DESCRIPTION

2.1 VAPOR SAMPLING SYSTEM

The team, consisting of Special Analytical Studies (SAS) personnel, used the vapor sampling system (VSS) to collect representative samples of the air, gases, and vapors from the headspace of SST 241-S-102 with sorbent traps and SUMMA¹ canisters on February 11, 1997. Mahon et al. (1994) describes in detail the VSS, its performance, and its operation.

The VSS comprises a mobile laboratory connected to the vapor space of the waste tank by stainless steel transfer tubing. A vacuum pump draws sample vapor from the tank headspace through the transfer tubing and into the sampling manifold. Electrically activated, pneumatically actuated, valves direct sample flow within the VSS. Instrumentation housed in the mobile laboratory monitors and controls system temperature, monitors absolute and differential system pressure, meters and controls vapor mass flow, and monitors total organic carbon (TOC) content of sample vapor using a gas chromatograph/flame ionization detector (GC/FID).

A key feature of the VSS is its use of heated transfer tubing and a heated sampling manifold. Maintaining the system at an elevated and controlled temperature prevents vapor condensation and reduces vapor adsorption on surfaces exposed to sample vapor. Mahon et al. (1994) describes various tests and observations that indicate the VSS sample transfer efficiency is consistently high.

Highly accurate mass flow controllers control the sample vapor flow rate through the sorbent traps at the sorbent trap station. The controllers FICV-1 through FICV-9 are mounted on top of the sorbent station between the inlet and outlet valves of their respective sampling ports. While controllers FICV-10 and FICV-11 are located downstream of the sorbent trap station and the in-line driers, which remove moisture from the sample vapor before it is metered.

The VSS is equipped with a Hewlett Packard 5890 Series II gas chromatograph (GC) which is equipped with a flame-ionization detector (FID), 1 mL sample loop, 10 port injection valve, 2 meter chromatographic column, programmable oven, and a portable computer loaded with the HP-Chemstation software providing computer control. The oven is programmed to heat from 50°C to 270°C at a rate of 70°C per minute. Helium is the carrier gas, air and hydrogen the

¹SUMMA is a registered trademark of Moleetrics, Inc., Cleveland, Ohio.

combustion gases, and nitrogen the make-up gas. The GC is plumbed to accept sample from the VSS manifold to the sample loop. After the sample is transferred into the sample loop and reaches equilibrium, the run is initiated by the operator from the computer. HP-Chemstation software activates the 10 port valve which transfers a sample from the sample loop to the HP-5 column. The column is 2m long and has an inside diameter of 0.25mm which is coated with a chemically bonded phenyl methyl silicone layer to minimize sample interference. The sample passes through the column to the FID which generates a TOC signal for that sample. The data is then transmitted to the computer where it is stored for future retrieval and analysis. The GC/FID is configured to confirm sampling system cleanliness, and to quantitatively estimate TOC concentration in ambient air and tank vapor samples in real time.

The system is multi-point calibrated at the weather station on a as available basis and last performed January 1995. The GC/FID has displayed a high degree of stability over a period of months. For further details, see Section 3.6, Field GC/FID Results.

Sorbent trap samples, pencil-size stainless steel or glass tubes that contain vapor-adsorbing media, are collected at the sorbent trap station of the sampling manifold. The rate and duration of flow, as specified by the analytical laboratory providing the sample media, determines the total volume of vapor to be passed through the tube. Virtually all the target analytes are trapped in the tube by the adsorbing media. Analyte concentration in the tank vapor can then be ascertained from the sorbent media analysis knowing the total volume of vapor which passed through the sorbent trap.

SUMMA[™] canisters, stainless steel vessels with their internal surfaces chemically passivated by the SUMMA[™] process to minimize adsorption of gases and vapors are used to sample tank vapor from the SUMMA[™] sampling station on the sampling manifold. The precleaned and evacuated SUMMA[™] canisters are filled with sample vapor by opening a manually operated valve, which is then shut after pressure equilibration to seal the sample inside. SUMMA[™] canisters allow a 6 liter sample to be transported to an analytical laboratory.

3.0 SAMPLING EVENT DESCRIPTION

3.1 SPECIFICATIONS

The Vapor Issue Resolution Program specifies sampling requirements in WHC-SD-WM-TP-522 Rev 0D, *Vapor Sampling and Analysis Plan* (Buckley 1997). The Sampling and Analysis Plan also specifies the types and number of samples to be collected, flow rates, and durations. These key sampling parameters are summarized on the sample log sheets in Appendix A. In addition to the sample log sheets, checksheets for each individual sample help ensure correct sampling procedures. The team retains these documents in the project file. This sample event's project-specific number is V7-006.

3.2 OPERATIONS AND SAMPLING PERSONNEL

Steve Carter was the Tank Farm Operations person-in-charge. The team members included:

R. D. Mahon, VSS Lead Scientist
E. S. Mast, Field Scientist

The VSS was set up at SST 241-S-102 on February 10, 1997 and was allowed to warm up overnight. Sampling began at about 09:00 a.m. on February 11, 1997, and was completed shortly After 11:30 p.m. the same day.

3.3 INDUSTRIAL HYGIENE FIELD RESULTS

Prior to hooking up to SST 241-S-102, an industrial hygiene technician field tested tank vapors. The technician purged the instrument/vent header for 5 minutes and then field measured vapor stream contents using a combustible gas indicator (CGI) and an organic vapor meter (OVM). The measurements were verbally reported, LEL 2%, NH₃ 600 ppm, O₂ 20.7%, and TOC 33 ppm.

3.4 AMBIENT CONDITIONS

The weather the day of the sampling event, February 11, 1997 was cold with a light wind. Graphs of ambient temperatures and pressures taken at the Hanford Meteorological Station, which is about 2.5 miles north east of S-Farm, are provided in Appendix B.

3.5 SAMPLE COLLECTION

The hot-water-jacketed sampling probe was located in Riser 7 of SST 241-S-102. The probe length, from the sample inlet to the top of the riser flange, was 6.1 meters.

All zones of the VSS were heated to 60 °C during setup of the VSS at SST 241-S-102 on February 10, 1997. The team stabilized the VSS temperature zones by 8:30 a.m. on February 11, 1997, and the system was ready to collect samples. Measured according to the VSS operating procedure, the pressure and temperature of SST 241-S-102 were 998 mbar (749.0 torr) and 22.5 °C, respectively. The sample log sheets (Appendix A) provide a complete chronology of the sample event including start and end times, flow rates, volumes, and specific sample identifiers.

Approximately 20 hours before the first samples were collected, the team began heating the VSS transfer tubing and sampling manifold. During this warmup period, the team began a purge of all vapor transfer tubing and the sampling manifold with ambient air. Prior to sampling tank vapors on February 11, 1997, the team collected two SUMMA[™] canister samples of ambient air, one manually 10 meters upwind of the VSS connection with SST 241-S-102, and the other using the VSS sampling manifold. The former was collected to establish background levels of trace organic vapors, and the latter was collected to establish the cleanliness of the sampling manifold. The flow meter's precision was verified prior to sampling. The Grubbs test for outliers was used to determine if a meter was operating outside of its acceptance range.

A leak check of the VSS sampling manifold and transfer tubing was performed. The system was evacuated to 272.5 mbar (204.4 torr) and leakage of ambient air into the system was observed by monitoring system pressure for 15 minutes. Leakage resulted in an increase of 4.2 mbar (3.2 torr) in system pressure during the 15 minute test.

The sampling valve was opened and the VSS was purged with sample vapor from SST 241-S-102 for 30 minutes at a total flow rate of 4.38 L/min. This purge was performed to flush ambient air from the system and saturate the system's active adsorption sites. Because the volume of transfer tubing and the sampling manifold upstream of the sampling devices is estimated to be no more than 10 L, this purge provided about 13.1 air turnovers in the system.

One analytical laboratory provided sample media. PNNL provided SUMMA[™] canisters, sorbent traps for organic vapors, ammonia (NH₃) and water vapor (H₂O), and TST sorbent traps.

3.6 FIELD GC/FID RESULTS

The GC\FID was not used in the sampling of tank 241-S-102 due to the time required to get approval by the new flammability committee for use in field sampling. Per the Sampling and Analysis Plan sampling continued without the GC\FID.

3.7 RADIATION SCREENING

Samples are unconditionally released from the SST farm in accordance with 19965-3E100-RSP-02 Rev 01, *Release Survey of Vapor Sampling Equipment* (WHC 1996). Radiological screening results are used to determine (1) if the samples must be shipped as radioactive or nonradioactive in accordance with U.S. Department of Transportation (DOT) regulations and (2) if the samples meet the laboratory acceptance criteria.

The DOT limits for shipping a nonradioactive sample are 2000 combined pCi/g of beta-gamma activity and alpha activity. Samples exceeding these DOT limits may be shipped as radioactive material if the samples do not exceed the following laboratory acceptance criteria:

PNNL: Beta-gamma activity <400 pCi/g of sample media.
 Alpha activity <100 pCi/g of sample media.

To protect the sampling manifold and sampling devices from radioactive particulates, all sample vapor for the February 11, 1997, SST 241-S-102 vapor sampling event was drawn through a series of four filters placed upstream of the sampling manifold. These four filters were in place any time tank vapors were flowing through the system. When sampling was complete, the filters were removed and assigned unique sample identifiers. All four filters were submitted to Waste Sampling Characterization Facility Laboratory for total alpha, total beta, and gamma energy analysis (GEA). The filter closest to the sampling manifold was analyzed to determine if the samples met DOT shipping criteria and laboratory acceptance criteria. Moisture from the tank vapors was collected in a silica gel trap through one of the sorbent station ports and analyzed for tritiated water. SST 241-S-102 filter and silica gel analysis results are shown in Table 1. The vapor team scientists use the activity results in Table 1 to calculate pCi/g of sample media. The team maintains this information in the project-specific file. The results in Table 1 indicate that the samples collected from SST 241-S-102 met the laboratory acceptance criteria and the DOT definition of a nonradioactive shipment.

Table 1. Radionuclide Analysis Results.

Filter	Sample Identifier	Activity Results ^a (pCi/sample)	Activity ^b (pCi/L of tank gas)
Upstream filter (box)	V7006-A21.OU1	Total Alpha = 120 Total Beta = 230 GEA = Cs ₁₃₇ 11.2	= 0.59 = 1.12 = 0.05
Downstream filter (box)	V7006-A22.OD1	Total Alpha = <0.12 Total Beta = 1.60 GEA = <detectable	= <detectable = 0.01 =<detectable
Upstream filter (VSS)	V7006-A23.OU2	Total Alpha = <0.37 Total Beta = 3.40 GEA = <detectable	= <detectable = 0.02 = <detectable
Downstream filter (VSS)	V7006-A24.OD2	Total Alpha = <0.49 Total Beta = 0.81 GEA = <detectable	= <detectable = 0.00 = <detectable
Tritium trap	V7006-A03.OT1	Total activity = 16	= 16 ^c

NOTES:

The samples are nonradioactive. These results were evaluated against laboratory acceptance criteria and DOT limits.

^aAll less than (<) values represent the minimum detection limits at Laboratory 222-S.

^bNumbers based on an approximation of the total volume of tank vapor through the filters. Appendix A and the sample checksheets were used to estimate a total flow through the VSS of 205.0 L.

^cNumber is calculated using a total volume of 1 L passing through the tritium trap.

4.0 SAMPLE CHAIN OF CUSTODY: RECEIPT, STORAGE, AND SHIPMENT

All sorbent trains, TSTs, and SUMMA[™] canisters received from PNNL were transported in a government vehicle to a custody locked storage area maintained by SAS. Sorbent trains, tubes and traps were maintained at 4 ± 2 °C in a refrigeration unit in the locked storage area.

On February 14, 1997, all sorbent tubes, TSTs, and SUMMA[™] canisters were transported by government vehicle to PNNL and delivered to J. A. Edwards. Table 2 lists the sample identifiers, types, and COC form numbers.

From the time that samples are received by SAS until they are shipped back to the analytical laboratory, all COCs are maintained by SAS in accordance with WHC-IP-1127-1.3, *Chain-of-Custody/Special Analysis Request for RCRA and CERCLA Protocol Samples* (WHC 1995a). Copies of the completed COC forms for this sampling event are included in Appendix C.

Table 2. Pacific Northwest National Laboratory Samples.

Sample Identifier	Sample Type	COC Number
V7006-A01.066	Ambient upwind SUMMA™	100658
V7006-A02.089	Ambient SUMMA™ (VSS)	100658
V7006-A04.142	SUMMA™	100658
V7006-A05.167	SUMMA™	100658
V7006-A06.169	SUMMA™	100658
V7001-A07.40R	NH ₃ /H ₂ O sorbent	100660
V7006-A08.41R	NH ₃ /H ₂ O sorbent	100660
V7006-A09.42R	NO ₃ /H ₂ O sorbent	100660
V7006-A10.43R	NH ₃ /H ₂ O sorbent	100660
V7006-A15.44R	NH ₃ /H ₂ O field blank	100660
V7006-A16.45R	NH ₃ /H ₂ O field blank	100660
V7006-A11.1115	TST	100659
V7006-A12.1116	TST	1006459
V7006-A13.1117	TST	100659
V7006-A14.1118	TST	100659
V7006-A17.1344	TST Field Blank	100659
V7006-A18.1345	TST Field Blank	100659
V7006-A19.1346	TST Trip Blank	100659
V7006-A20.1347	TST Trip Blank	100659

5.0 QUALITY ASSURANCE AND CONTROLS

5.1 VAPOR SAMPLING SYSTEM CLEANING

Immediately prior to sampling of SST 241-S-102, the VSS manifold and vapor sample transfer tubing was heated to 60 °C and ambient air was purged through the system for 1200 minutes. Also, all pertinent system valves were actuated to release any contaminants that may have collected in the VSS valves themselves. A SUMMA™ canister ambient air sample was then collected to confirm by laboratory analysis that the VSS sampling manifold was free of trace organic contaminants (or to determine which contaminants were present and at what concentration), as discussed in Section 3.5. For further details, refer to Appendix E of WHC-IP-1127-4.10 (WHC 1995b) and the project-specific file located with the team.

Table 3. Calibration Data.

Element	Calibration Date	Expiration Date	WHC Standards Laboratory Code	Sierra Instruments, Inc. Code
FICV-1	8/16/96	8/16/97	518-28-03-012	82254
FICV-2	8/16/96	8/16/97	518-28-03-008	78254
FICV-3	8/16/96	8/16/97	518-28-03-004	37023
FICV-4	8/16/96	8/16/97	518-28-03-006	44023
FICV-5	8/16/96	8/16/97	518-28-03-011	81274
FICV-6	8/16/96	8/16/97	518-28-03-009	80274
FICV-7	8/16/96	8/16/97	518-28-03-014	48264
FICV-8	8/16/96	8/16/97	518-28-03-013	47264
FICV-9	8/16/96	8/16/97	518-28-03-007	47023
FICV-10	8/16/96	8/16/97	518-28-03-010	81254
FICV-11	8/16/96	8/16/97	518-28-03-005	43023
PE-1	6/27/96	6/27/97	518-80-02-005	NA
PE-2	6/28/96	6/28/97	518-80-02-006	NA
PE-3	6/28/96	6/28/97	518-80-02-008	NA
PE-4	6/27/96	6/27/97	518-80-02-007	NA
PD-1	6/26/96	6/26/97	518-80-02-004	NA
PD-26/26/96	6/26/97	6/26/97	518-80-02-003	NA
Temperature Control System	7/24/96	7/24/97	ES-96-00543/W	NA

5.2 INSTRUMENT CALIBRATION

Instruments located in the VSS are calibrated on an annual basis. VSS instrumentation calibration data, maintained in files by the team, are summarized in Table 3. Errors associated with the mass flow meters and totalizers were determined by the Sierra Instruments Inc. all mass flow meters were within 0.5% full scale during the SST 241-S-102 sampling event.

The flow measurements for this sampling event may have an error of 6 percent to 14 percent due to the mass flow measuring devices recalibration discrepancies. A detailed description of this discrepancy can be found in internal memo 75-820-96-028 (Tribble 1996c).

5.3 BLANK SAMPLES

Trip blanks are samples that accompany the sample media from the point of generation through sample analysis. They are transported to the field with the sample collection media but remain unopened during the sampling event. Analysis of trip blanks is used to assess cross-contamination of sample media during field transport and storage.

Field blanks are sampling devices similar to trip blanks. They are prepared and handled in the same manner as the sampling media, but no tank vapors are drawn through them.

Spiked blanks are prepared as regular sampling media but also contain a known amount of special analyte. Tank vapors are drawn through these blanks and they are handled and analyzed just like any other sample. Analysis of the spiked blanks is used to evaluate potential sample loss during shipment or storage.

Ambient blanks are samples of ambient air collected at the sampling location. Analysis of ambient blanks is used to assess contamination that may be present in the atmosphere or in the transfer tubing or sampling manifold of the VSS immediately prior to sampling operations.

Table 2 lists sample blanks used during the sampling of SST 241-S-102.

6.0 ANOMALIES

All samples were collected in accordance with the TCP and WHC-IP-1127-4.10, *Collection of Parallel Sorbent Tube & SUMMA Canister Samples Using the Vapor Sampling System* (1995b). There were no anomalies during the VSS sampling event.

7.0 REFERENCES

- 49 CFR 100-177, 1992, "Transportation," *Code of Federal Regulations*, as amended.
- Buckley, L. L., 1997, *Vapor Sampling and Analysis Plan*, WHC-SD-WM-TP-522 Rev. 0D, Westinghouse Hanford Company, Richland, Washington.
- Mahon, R. D., C. M. Jones, and M. S. Story, 1994 (draft), *Evaluation of the Capabilities and Use of the Vapor Sampling System for Tank Headspace Sampling and Characterization*, SD-WM-RPT-094, Westinghouse Hanford Company, Richland, Washington.
- Trible, T. C., Viswanath, R. S., 1996c, *Recommendation concerning the ISVS/VSS comparison study data with respect to calibration errors in Mass flow monitors and controllers*, (internal memo 75820-96-028 to L.D. Pennington, August 28), Westinghouse Hanford Company, Richland, Washington.
- WHC, 1995a, *Chain-of-Custody/Special Analysis Request for RCRA and CERCLA Protocol Samples*, Procedure WHC-IP-1127-1.3, Rev. 1, Westinghouse Hanford Company, Richland, Washington.
- WHC, 1995b, *Collection of Parallel Sorbent Tube & SUMMA Canister Samples Using the Vapor Sampling System (VSS)*, Procedure WHC-IP-1127-4.10, Westinghouse Hanford Company, Richland, Washington.
- WHC, 1996, *Release Survey of Vapor Sampling Equipment*, Procedure 1996-3E100-RSP-02 Rev 01, Westinghouse Hanford Company, Richland, Washington.

This page intentionally left blank.

APPENDIX A
SAMPLE LOG SHEETS

This page intentionally left blank.

VSS Sampling of
S-102

Set up VSS (Section A)(Temperature set point = 60°C)

Ensure HEPA filters are installed

Ensure connection to sample probe

System status check sheet. (Verify zones are to temp)

Tank Temperature 22.5

Date: 11 FEB 97

VSS Personnel: Mahon, Mast

Trailer Personnel: None

Tank Temperature 22.5

WHC Sample ID	Sample ID	Valve #	Port	Description	Desired Flow Rate SCCM	Desired Total Flow Rate SCCM	Actual Flow Rate SCCM	Actual Start Time	Actual End Time	Actual Total Time (min.)	Actual Total Flow Liters
Purge with ambient air for 30 min.											
V7006- A01 086	086	Upwind		AMBIENT #1	5500	165000	4385	1245	0830	1200	
V7006- A02 089	089	15		AMBIENT #2	5500	165000	4240	0859	0900	1	
LEAK CHECK(APPENDIX A) Leak Rate: 12.8 Torr/Hr											
Purge with tank air for 30 min											
Measure tank pressure PE-1 = 749.0 Torr											
V7006- A03 OT1	W97V00024	4		Tritium Trap	200	1000	200	1034	1039	5	1.00
V7006- A04 142	142	11		SUMMA #3	200	1000	200	1045	1046	1	6.00
V7006- A05 167	167	13		SUMMA #4	200	1000	200	1049	1050	1	6.00
V7006- A06 169	169	15		SUMMA #5	200	1000	200	1053	1054	1	6.00
V7006- A07 40R	#40R	1		NH3/NOx/H2O (#1)	200	2000	200	1102	1112	10	2.00
V7006- A08 41R	#41R	2		NH3/NOx/H2O (#2)	200	2000	200	1102	1112	10	2.00
V7006- A09 42R	#42R	3		NH3/NOx/H2O (#3)	200	2000	200	1102	1112	10	2.00
V7006- A10 43R	#43R	4		NH3/NOx/H2O (#4)	200	2000	200	1102	1112	10	2.00
V7006- A11 1115	#1115	3		TST #1	100	200	100	1126	1128	2	0.20
V7006- A12 1116	#1116	4		TST #2	100	200	100	1126	1128	2	0.20
V7006- A13 1117	#1117	3		TST #3	100	200	100	1133	1135	2	0.20
V7006- A14 1118	#1118	4		TST #4	100	200	100	1133	1136	2	0.20

VSS Sampling of
S-102

WHC Sample ID	Sample ID	Port Valve #	Description	Desired Flow Rate SCCM	Desired Duration (min.)	Desired Total Flow SCCM	Actual Start Time	Actual End Time	Actual Flow Rate SCCM	Actual Total Time (min.)	Actual Total Flow Liters
---------------	-----------	--------------	-------------	------------------------	-------------------------	-------------------------	-------------------	-----------------	-----------------------	--------------------------	--------------------------

V7006- A17 1344	#1344		TST FIELD BLANK #1				1138	1139		1	
V7006- A18 1345	#1345		TST FIELD BLANK #2				1138	1139		1	
V7006- A15 44R	#44R		NH3/NOx/H2O FIELD BLANK #1				1116	1117		1	
V7006- A16 45R	#45R		NH3/NOx/H2O FIELD BLANK #2				1116	1117		1	

TOTAL TANK GAS USED DURING SAMPLING RUNS

27.80

V7006- A21 0U1	W97V00020		Upstream filter (box)								
V7006- A22 0D1	W97V00021		Downstream filter (box)								
V7006- A23 0U2	W97V00022		Upstream filter (VSS)								
V7006- A24 0D2	W97V00023		Downstream filter (VSS)								

Trip Blanks (DO NOT EXPOSE)

V7006- A19 1346	TST#1346		TST TRIP #1								
V7006- A20 1347	TST#1347		TST TRIP #2								

Note: SCCM for the VSS is reported at 760 torr, 21 C


Observations / Anomalies

This page intentionally left blank.

APPENDIX B
AMBIENT CONDITIONS

This page intentionally left blank.

WEATHER DURING VSS SAMPLING OF 241-S-102

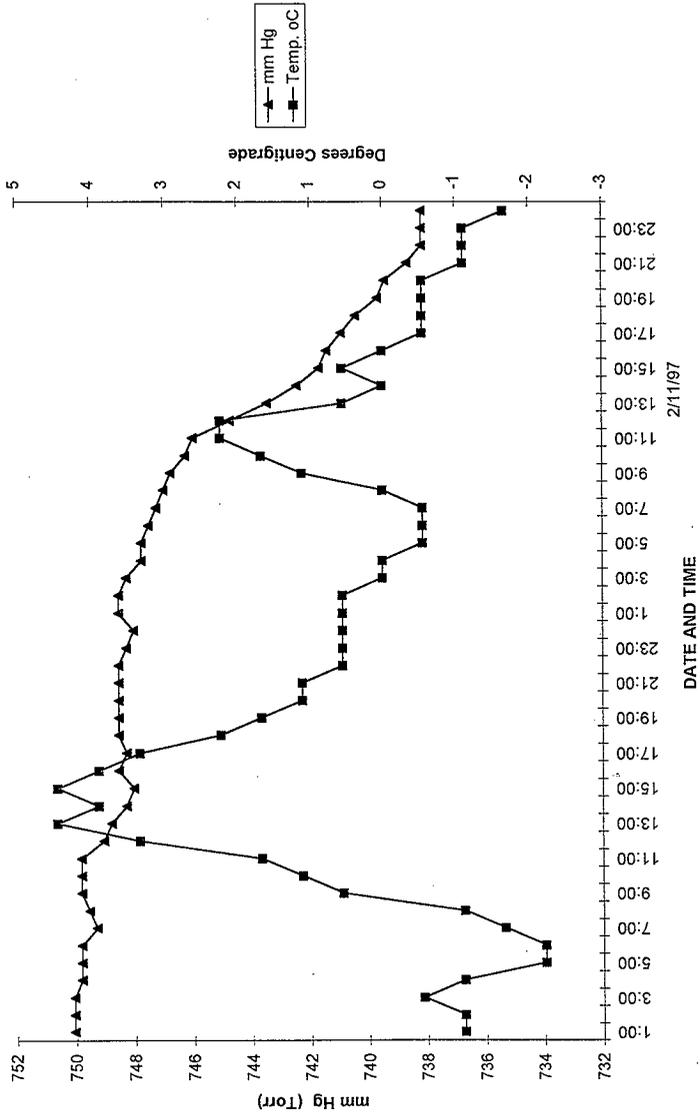

This page intentionally left blank.

APPENDIX C
CHAIN-OF-CUSTODY FORMS

This page intentionally left blank.

Battelle Pacific National Northwest Lab **CHAIN OF CUSTODY** **WHC 100658**

Custody Form Initiator J. A. Edwards - PNNL Telephone (509) 373-0141
 Page 85-3009 / FAX 376-0418

Company Contact R. D. Mahon - SESC Telephone (509) 373-7533
 Page 85-9656 / FAX 373-3193

Project Designation/Sampling Locations 200 West Tank Farm
 241-S-102 Tank Vapor Sample SAF V7006 Collection date 2-11-97
 Preparation date 02-06-97

Temporal #5 Riser # 7 VSS

Ice Chest No. Field Logbook No. WHC-N-647-10

Bill of Lading/Airbill No. N/A Offsite Property No. N/A

Method of Shipment Government Truck Collectors: Mahon / PNNL

Shipped to PNNL

Possible Sample Hazards/Remarks Unknown at time of sampling

Sample Identification

		<u>Sample Date/Time</u>
V7006 - A01 . 066	Collect Ambient Air Sample SUMMA #1	<u>2/11/97 1059</u>
V7006 - A02 . 089	Collect Ambient Air Sample SUMMA #2	<u>2/11/97 1091</u>
V7006 - A04 . 142	Collect SUMMA #3	<u>2/11/97 1045</u>
V7006 - A05 . 167	Collect SUMMA #4	<u>2/11/97 1049</u>
V7006 - A06 . 169	Collect SUMMA #5	<u>2/11/97 1053</u>

<input type="checkbox"/> Field Transfer of Custody	<input checked="" type="checkbox"/> Chain of Possession		(Sign and Print Names)		
Relinquished By	Date	Time	Received By	Date	Time
J A Edwards <u>J A Edwards</u>	02-10-97	1015	<u>CSMULLIN</u> <u>CSMULLIN</u>	02-10-97	1015
<u>CSMULLIN</u> <u>CSMULLIN</u>	02-10-97	1430	<u>ES MAST</u> <u>S. J. Mast</u>	02-10-97	1430
<u>ES MAST</u> <u>S. J. Mast</u>	02-14-97	0900	<u>CSMULLIN</u> <u>CSMULLIN</u>	2-14-97	0900
<u>CSMULLIN</u> <u>CSMULLIN</u>	2-14-97	1015	<u>J A EDWARDS</u> <u>J A Edwards</u>	2-14-97	1015

Final Sample Disposition

Comments:

- | | | |
|--------------------------------------|---------------------------|------------------|
| <u>PNNL (only) Checklist</u> | <u>Pick-up / Delivery</u> | <u>Comments:</u> |
| ◊ Media labeled and checked? | <u>Y/N</u> | |
| ◊ Letter of instruction? | <u>Y/N</u> | |
| ◊ Media in good condition? | <u>Y/N</u> | |
| ◊ COC info/signatures complete? | <u>Y/N</u> | |
| ◊ Rad release stickers on samples? | <u>Y/N</u> | |
| ◊ Activity report from 222S? | <u>Y/N</u> | |
| ◊ RSR/release? (a ≤100/B ≤400 pCi/g) | <u>Y/N</u> | |
| ◊ COC copy for LRB, RIDS filed? | <u>Y/N</u> | |

POC (J) POC (J)

(WHC-SD-WM-TP-335, REV. 2, Table 2b)

(Revised 10/01/96 PNNL)

Battelle Pacific National Northwest Lab	CHAIN OF CUSTODY	WHC 100660
--	-------------------------	-------------------

Custody Form Initiator	J. A. Edwards - PNNL	Telephone (509) 373-0141 Page 85-3009 / FAX 376-0418
Company Contact	R. D. Mahon - SESC	Telephone (509) 373-7533 Page 85-9656 / FAX 373-3193
Project Designation/Sampling Locations	200 West Tank Farm 241-S-102 Tank Vapor Sample SAF V7006	Collection date <u>2-11-97</u> Preparation date 01 - 23 - 97
Temporal #5	Riser # <u>7</u>	VSS
Ice Chest No.		Field Logbook No. <u>WHC-A-19740</u>
Bill of Lading/Airbill No.	N/A	Offsite Property No. N/A
Method of Shipment	Government Truck	Collectors: <u>MAHON / MAST</u>
Shipped to	PNNL	
Possible Sample Hazards/Remarks Unknown at time of sampling		

Sample Identification

		<u>Sample Date/Time</u>
V7006 - A07 . 40R	Collect NH ₃ /NO _x /H ₂ O Sorbent Trap	<u>2/11/97 1102</u>
V7006 - A08 . 41R	Collect NH ₃ /NO _x /H ₂ O Sorbent Trap	<u>2/11/97 1102</u>
V7006 - A09 . 42R	Collect NH ₃ /NO _x /H ₂ O Sorbent Trap	<u>2/11/97 1102</u>
V7006 - A10 . 43R	Collect NH ₃ /NO _x /H ₂ O Sorbent Trap	<u>2/11/97 1102</u>
V7006 - A15 . 44R	Open, close and store NH ₃ /NO _x /H ₂ O field blank #1	<u>2/11/97 1116</u>
V7006 - A16 . 45R	Open, close and store NH ₃ /NO _x /H ₂ O field blank #2	<u>2/11/97 1116</u>

() Field Transfer of Custody		(X) Chain of Possession		(Sign and Print Names)		
Relinquished By	Date	Time	Received By	Date	Time	
L M Thomas <i>L M Thomas</i>	01-27-97	1015	J A Edwards <i>J A Edwards</i>	01-27-97	1015	
J A Edwards <i>J A Edwards</i>	02-10-97	1019	C S M Cella <i>C S M Cella</i>	02-10-97	1019	
C S M Cella <i>C S M Cella</i>	02-10-97	1430	R D Mahon <i>R D Mahon</i>	02-10-97	1430	
R D Mahon <i>R D Mahon</i>	2-14-97	0900	C S M Cella <i>C S M Cella</i>	2-14-97	0900	
C S M Cella <i>C S M Cella</i>	2-14-97	1020	J A Edwards <i>J A Edwards</i>	2-14-97	1020	

Final Sample Disposition

Comments:

- | PNNL (only) Checklist | Pick-up / Delivery | Comments: |
|------------------------------------|--------------------|-----------|
| Media labeled and checked? | (X) Y/N | |
| Letter of instruction? | (X) Y/N | |
| Media in good condition? | (X) Y/N | |
| COC info/signatures complete? | (X) Y/N | |
| Rad release stickers on samples? | (X) Y/N | |
| Activity report from 222S? | (X) Y/N | |
| RSR/release? (a ≤100/B ≤400 pCi/g) | (X) Y/N | |
| COC copy for LRB, RIDS filed? | (X) Y/N | |

POC *[Signature]* POC *[Signature]*

(WHC-SD-WM-TP-335, REV. 2, Table 2b)

(Revised 10/01/96 PNNL)

10

Battelle Pacific Northwest National Laboratory **CHAIN OF CUSTODY** **WHC 1006569**

Custody Form Initiator: J. A. Edwards - PNL
 Telephone: (509) 373-0141
 Page: 85-3009 / P8-08 / FAX 376-0418

Company Contact: R. D. Mahon - WHC
 Telephone: (509) 373-7437
 Page: 85-9656 / S3-27 / FAX 373-7076

Project Designation/Sampling Locations: 200 West Tank Farm
 241-S-102 Tank Vapor Sample SAF V7006
 Temporal #4 Riser # 7 (VSS Truck)
 Ice Chest No.

Collection date: 2-11-97
 Preparation date: 02-06-97

Field Logbook No. WHC N-0140
 2/11/97

Ertec Hi/Lo thermometer No. PNL-T-005

Bill of Lading/Airbill No. N/A

Method of Shipment: Government Truck
 Offsite Property No. N/A

Shipped to: RUST-
 Collector(s): MATHEW / MARY

Possible Sample Hazards/Remarks: Unknown at time of sampling

Sample Identification

V7006 - A11 . 1115	PNL Triple Sorbent Trap (TST) Sample #1	2-11-97 / 1126
V7006 - A12 . 1116	PNL TST Sample #2	2-11-97 / 1126
V7006 - A13 . 1117	PNL TST Sample #3	2-11-97 / 1123
V7006 - A14 . 1118	PNL TST Sample #4	2-11-97 / 1133
V7006 - A17 . 1344	Open, close & store TST Field Blank #1	2-11-97 / 1138
V7006 - A18 . 1345	Open, close & store TST Field Blank #2	2-11-97 / 1138
V7006 - A19 . 1346	Store TST Trip Blank #1	2-11-97 / —
V7006 - A20 . 1347	Store TST Trip Blank #2	2-11-97 / —

[] Field Transfer of Custody		[X] Chain of Possession		(Sign and Print Names)	
Relinquished By	Date	Time	Received By	Date	Time
JL Julva	02-06-97	1010	JA Edwards	02-06-97	1010
JA Edwards	02-10-97	1016	CS MacLellan	02-10-97	1016
CS MacLellan	02-10-97	1430	PS MARY	02-10-97	1430
PS MARY	2-14-97	0920	CS MacLellan	2-14-97	0900
CS MacLellan	2-14-97	1020	JA EDWARDS	2-14-97	1020

Final Sample Disposition

Comments:

- PNL (only) Checklist
 - Media labeled and checked? Y N
 - Letter of instruction? Y N
 - Media in good condition? Y N
 - COC info/signatures complete? Y N
 - Sorbents shipped on ice? (<5°C) Y N
 - Hi/Lo thermometer - Keep upright! Y N
 - Hi/Lo thermometer Y N
 - Rad release stickers on samples? Y N
 - Activity report from 222S? Y N
 - COC copy for LRB, RIDS filed? Y N
- POC POC

Comments:

Cooler Temperature Status

Hi -17 °C / Lo -17 °C (pick up at PNL to WHC) |

Hi _____ °C / Lo _____ °C (delivery at WHC from PNL) |

Hi _____ °C / Lo _____ °C (at return to PNL from WHC) |

Hi +7 °C / Lo -19 °C (at delivery from WHC to PNL) |

(Revised 06/21/95 PNL)

DISTRIBUTION SHEET

To Distribution	From Special Analytical Support, Numatec Hanford	Page 1 of 1 Date 8/7/97
Project Title/Work Order VAPOR AND GAS SAMPLING USING THE IN SITU VAPOR SAMPLING SYSTEM		EDT No. <u>621405</u> ECN No.

Name	MSIN	Text With All Attach.	Text Only	Attach./ Appendix Only	EDT/ECN Only
<u>Lockheed Martin Hanford Company</u>					
L. L. Buckley	R2-12	X			
<u>Lockheed Martin Services, Inc.</u>					
Central Files	A3-88	X			
<u>SGN Eurisys Services Corporation</u>					
E. S. Mast	S3-90	X			
<u>PNNL</u>					
J. L. Huckaby	K6-80	X			