sita. 4 S

21 JUN 23 2003

ENGINEERING DATA TRANSMITTAL

Page 1 of 1

1. EDT 637302

2. To: (Receiving Organization) Distribution	3. From: (Originating Organization) Design Engineering	4. Related EDT No.: N/A
5. Proj./Prog./Dept./Div.: Dome Load	6. Design Authority/Design Agent/Cog. Engr.: L.J. Julyk	7. Purchase Order No.: N/A
8. Originator Remarks: To release document		9. Equip./Component No.: Single-Shell Tanks
		10. System/Bldg./Facility: SX Tank Farm
		12. Major Assm. Dwg. No.: N/A
11. Receiver Remarks: None	11A. Design Baseline Document? ○ Yes ◉ No	13. Permit/Permit Application No.: N/A
		14. Required Response Date: N/A

15. DATA TRANSMITTED

(A) Item No.	(B) Document/Drawing No.	(C) Sheet No.	(D) Rev. No.	(E) Title or Description of Data Transmitted	(F) Approval Designator	(G) Reason for Transmittal	(H) Originator Disposition	(I) Receiver Disposition
1	RPP-13991	N/A	0	Sample AOR Calculation using ANSYS Axisymmetric Parametric Model for Tank SST-SX	N/A	1	1	1

16. KEY

Approval Designator (F)	Reason for Transmittal (G)	Disposition (H) & (I)
E, S, Q, D OR N/A (See WHC-CM-3-5, Sec. 12.7)	1. Approval 2. Release 3. Information 4. Review 5. Post-Review 6. Dist. (Receipt Acknow. Required)	1. Approved 2. Approved w/comment 3. Disapproved w/comment 4. Reviewed no/comment 5. Reviewed w/comment 6. Receipt acknowledged

17. SIGNATURE/DISTRIBUTION (See Approval Designator for required signatures)

(G) Reason	(H) Disp.	(J) Name	(K) Signature	(L) Date	(M) MSIN	(G) Reason	(H) Disp.	(J) Name	(K) Signature	(L) Date	(M) MSIN
		Design Authority									
1	1	Design Agent L.J. Julyk	L.J. Julyk	6/17/03	R1-14						
		Cog. Eng.									
1	1	Cog. Mgr. C. Defigh-Price	C. Defigh-Price	6-19-03	R2-58						
		QA									
		Safety									
		Env.									

18.	19.	20.	21. DOE APPROVAL (if required)
L.J. Julyk 6/17/03	T.C. Mackey 6/19/03	C. Defigh-Price 6-19-03	Ctrl No. N/A
Signature of EDT Originator / Date	Authorized Representative for Receiving Organization / Date	Design Authority/ Cognizant Manager / Date	○ Approved ○ Approved w/comments ○ Disapproved w/comments

BD-7400-172-2 (10/97)

BD-7400-172-1

DISTRIBUTION SHEET

To	From	Page 1 of 1
Distribution	Design Engineering	Date 6/17/03
Project Title/Work Order		EDT No. 637302
Sample AOR Calculation using ANSYS Axisymmetric Parametric Model for Tank SST-SX (RPP-13991 Rev. 0)		ECN No.

Name	MSIN	Text With All Attach.	Text Only	Attach./ Appendix Only	EDT/ECN Only
M.A. Fish	R1-14				x
T.C. Oten	S5-07				x
E.R. Hamm	R1-31				x
M.R. Koch	S7-83				x
C. Defigh-Price	R2-58				x
L.J. Julyk	R1-14	x			
T.C. Mackey	R1-14	x			
A.H. Friberg	R1-14				x
Central Files	A3-88	x			
DOE Reading Room	H2-53	x			

A-6000-135 (10/97)

Sample AOR Calculation using ANSYS Axisymmetric Parametric Model for Tank SST-SX

L.J. Julyk/T.C. Mackey
CH2M HILL Hanford Group, Inc.
Richland, WA 99352
U.S. Department of Energy Contract DE-AC27-99RL14047

EDT/ECN: 637302 UC: N/A
Cost Center: 7G120 Charge Code: 102607
B&R Code: N/A Total Pages: 51

Key Words: single-shell tanks, SX farm, dome load, ANSYS, analysis of record

Abstract: This document documents the ANSYS axisymmetric parametric model for single-shell tank SX and provides sample calculation for analysis-of-record mechanical load conditions.

TRADEMARK DISCLAIMER. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

Printed in the United States of America. To obtain copies of this document, contact: Document Control Services, P.O. Box 950, Mailstop H6-08, Richland WA 99352, Phone (509) 372-2420; Fax (509) 376-4989.

JUN 23 2003
DATE
STA. 4
HANFORD RELEASE
ID: 21

Release Approval 6/19/03 Date Release Stamp

Approved For Public Release

RPP-13991
Revision 0

Sample AOR Calculation using ANSYS Axisymmetric Parametric Model for Tank SST-SX

Prepared for the U.S. Department of Energy
Assistant Secretary for Environmental Management

CH2MHILL
Hanford Group, Inc.
Richland, Washington
Contractor for the U.S. Department of Energy
Office of River Protection under Contract DE-AC06-99RL14047

Approved for Public Release; Further Dissemination Unlimited

RPP-13991
Revision 0

Sample AOR Calculation using ANSYS Axisymmetric Parametric Model for Tank SST-SX

L. J. Julyk / T. C. Mackey
CH2MHILL Hanford Group, Inc.

Xianghong Li / Jim Radochia
JLR The Engineering Solutions Company

Date Published
May 2003

CH2MHILL
Hanford Group, Inc.

P. O. Box 1500
Richland, Washington

Contractor for the U.S. Department of Energy
Office of River Protection under Contract DE-AC06-99RL14047

Approved for Public Release; Further Dissemination Unlimited

LEGAL DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

This report has been reproduced from the best available copy. Available in paper copy and microfiche.

Available electronically at
http://www.doe.gov/bridge. Available for a processing fee to the U.S. Department of Energy and its contractors, in paper, from:
U.S. Department of Energy
Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831-0062
phone: 865-576-8401
fax: 865-576-5728
email: reports@adonis.osti.gov(423) 576-8401

Available for sale to the public, in paper, from:
U.S. Department of Commerce
National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
Phone: 800-553-6847
fax: 703-605-6900
email: orders@ ntis.fedworld.gov
online ordering:
http://www.ntis.gov/ordering.htm

Printed in the United States of America

The subject document has been reviewed by the undersigned.
The reviewer reviewed and verified the following items as applicable.

Document Reviewed: RPP-13991, Rev. 0, Sample AOR Calculation using ANSYS Axisymmetric Parametric Model for Tank SST-SX

Analysis performed by: Xianghong Li / Jim Radochia
JLR The Engineering Solutions Company

- Design Input*
- Basic Assumption
- Approach/Design Methodology
- Related Information
- Conclusion/Result Interpretation

*Default values of changeable parameters in model are for example only. User of model must confirm proper input of parameter values for specific application of model.

An electronic version of model is available from undersigned. See attached ERATA sheet for any known problems with model.

Reviewer/Approver (print) L. J. Julyk / Design Engineering

Reviewer/Approver (signature) 6/17/03
Date

CHECKLIST FOR INDEPENDENT REVIEW

Document Reviewed: RPP-13991, Rev. 0, Sample AOR Calculation using ANSYS Axisymmetric Parametric Model for Tank SST-SX

Author: Xianghong Li / Jim Radochia
JLR The Engineering Solutions Company

Yes	No	N/A	
[X]	[ ]	[ ]	Problem completely defined.
[X]	[ ]	[ ]	Necessary assumptions explicitly stated and supported.
[X]	[ ]	[ ]	Computer codes and data files documented.
[X]	[ ]	[ ]	Data used in calculations explicitly stated in document.
[X]	[ ]	[ ]	Data checked for consistency with original source information as applicable.
[X]	[ ]	[ ]	Mathematical derivations checked including dimensional consistency of results.
[X]	[ ]	[ ]	Models appropriate and used within range of validity or use outside range of established validity justified.
[X]	[ ]	[ ]	Hand calculations checked for errors.
[X]	[ ]	[ ]	Code run streams correct and consistent with analysis documentation.
[X]	[ ]	[ ]	Code output consistent with input and with results reported in analysis documentation.
[ ]	[ ]	[X]*	Acceptability limits on analytical results applicable and supported. Limits checked against sources.
[ ]	[ ]	[X]*	Safety margins consistent with good engineering practices.
[X]	[ ]	[ ]	Conclusions consistent with analytical results and applicable limits.
[X]	[ ]	[ ]	Results and conclusions address all points required in the problem statement.

* Sample Calculation/Model Development

B. V. Winkel (M&D) B. V. Winkel 6-10-03
Reviewer Date

L. J. Julyk (CHG) L. J. Julyk 6/17/03
Reviewer Date

ERRATA

ANSYS Macro	Tracking #	Issue Description	Recommended Action
Parm_sx.mac	1	Material properties are set at default values that may or may not be appropriate for specific analysis.	Verify material input values appropriate for specific analysis.
	2	Concrete creep coefficients not listed.	See RPP-13990 for proper creep coefficient specification and usage.

ANSYS is a registered trademark of SAS IP, Inc.

ANALYTICAL CALCULATIONS

		Page	1 of 44
Subject	**Sample AOR Calculation using ANSYS Axisymmetric Parametric Model for Tank SST-SX**		
Originator	Xianghong Li	Date	3/11/03
Checker	Jim Radochia	Date	3/11/03

TABLE OF CONTENTS

1.0 Objective/Purpose 4

2.0 Methods of Analysis 4

3.0 Input Data 4

4.0 Results 10

5.0 Conclusions 17

6.0 References 17

7.0 Attachments and Appendices 18

sst_sx.mac 18

parm_sx.mac 26

set_load_sx.mac 29

pst_proc_sx.mac 30

get_res.mac 41

get_hpfrc.mac 43

plpng.mac 44

path_sx.plt 44

FIGURES

Figure 1 - Geometry of SST-SX tank 6

Figure 2 – Soil layers 6

Figure 3 – Finite element mesh, showing elements colored by material ID 7

Figure 4 – Close-up of finite element mesh 7

Figure 5 – Close-up of finite element mesh 8

Figure 6 – Boundary conditions 8

Figure 7 – Uniform and vacuum load for SST-SX tanks 9

Figure 8 – Concentrated load for SST-SX tanks 9

Figure 9 – Total displacement contour of soil and tank 11

Figure 10 – Total displacement contour of tank 11

Figure 11 – Deformed shape of soil 12

Figure 12 – Deformed shape of tank 12

Figure 13 – Equivalent stress contours of tank and soil 13

Figure 14 – Equivalent stress contours of tank 13

Figure 15 – Hoop stress of tank 14

Figure 16 – Unit section axial force 14

Figure 17 – Unit section shear force 15

Figure 18 – Unit section hoop force 15

Figure 19 – Unit section moment 16

TABLES

Table 1 – Material Properties.....5

Table 2 – Input File List.....5

1.0 OBJECTIVE/PURPOSE

The purpose of this calculation is to develop a parametric model for single shell tank (SST) SX, and provide a sample analysis of the SST-SX tank based on analysis of record (AOR) loads. The SST-SX model is based on buyer-supplied as-built drawings and information for the AOR for SSTs, encompassing the existing tank load conditions, and evaluates stresses and deformations throughout the tank and surrounding soil mass.

These sample calculations in this document are not to be used for assessing the structural integrity of the SST-SX tanks at the Hanford site.

2.0 METHODS OF ANALYSIS

1. A simplified linear, axisymmetric shell model of the SST-SX tanks was first developed using the ANSYS Parametric Design Language (APDL) in ANSYS 7.0, a general purpose finite element analysis program [Ref 1]. Assumptions derived from RPP-14249 [Ref 2] are applied to the model, including a) no liner or waste present in the tank, b) no friction/contact at the soil/tank interface, c) no rebar, d) elastic soil modulus, and e) Poisson's ratio of 0.27 for soil.

2. The parametric model of the SST-SX tank was then analyzed based on AOR loads. Contour plots showing stress and displacement are provided, as are tables summarizing force/moment resultants.

3.0 INPUT DATA

The geometry of the SST-SX tank is provided in drawing H-2-39511 [Ref 4], and is shown in Figure 1. The parametric model includes material properties for the tank, and nominal soil material properties. For purposes of this calculation, the soil overburden (at the top of the tank dome) is 8.52 feet [Ref 3], with a unit weight of 125 pcf, Poisson ratio of 0.27. The soil is divided into three layers, shown in Figure 2. Each layer has different elastic moduli. Material properties for structural concrete and soil are the same as those in document RPP-14249 [Ref 2], and are listed in Table 1. The concrete reinforcing bar properties are also specified in the drawing, but are not needed for this simplified analysis.

Table 1. Material Properties [Ref_2]

Material	Elastic Modulus (psi)	Poisson's Ratio	Density (lb/ft³)
Structural Concrete	3,100,000	0.2	150
Top Soil	7,000	0.27	125
Mid-Soil	13,000	0.27	125
Bottom Soil	20,000	0.27	125

Both the concrete tank and soil are modeled with 2D solid elements PLANE42, with axisymmetric characteristics turned on. Figures 3 through 5 show the finite element mesh used for this calculation.

The AOR loads for the SST-SX tank includes a uniform pressure load of 40 lbf/ft² on the soil surface and a concentrated load of 200 kip over a circular region with a radius of 10 ft. The concentrated load is applied to the soil surface as a pressure load in this calculation. A vacuum load of -6 in. water gage was also applied to the inside surface of the tank. Boundary conditions for the axisymmetric model are shown in Figure 6. Figure 7 shows the uniform and vacuum pressure loads, and Figure 8 depicts the concentrated load for the SST-SX tank. Gravity is also included in the calculation.

The parametric inputs used in this calculation are summarized in the attachments. The files and their functions are listed in Table 2.

Table 2. Input File List

Input File Name	Function	Calling For
sst_sx.mac	Master input creating parametric model for SST-SX tank and getting solutions	parm_sx.mac set_load_sx.mac
parm_sx.mac	Set all parametric variables used to create the parametric model	NONE
set_load_sx.mac	Apply boundary conditions and AOR loads	NONE
pst_proc_sx.mac	Calculate section force/moment, generate results pictures, output path data to path_sx.dat file	get_res.mac get_hpfrc.mac plpng.mac path_sx.plt
get_res.mac	Calculate total forces and moments at individual section	NONE
plpng.mac	Create image hard copy in png format	NONE
path_sx.plt	View setting for path plot	NONE
get_hpfrc.mac	Calculate section hoop force	NONE

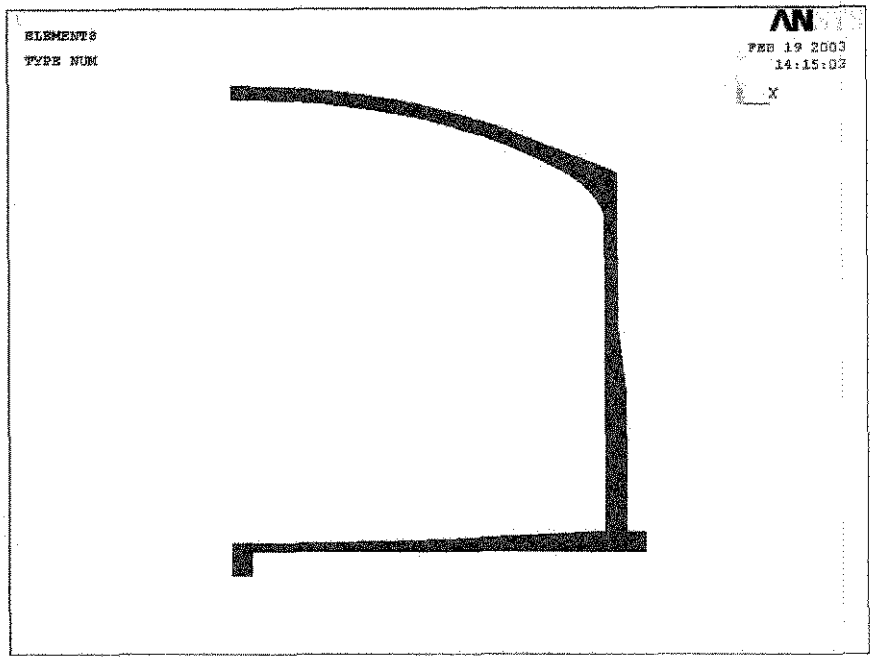

Figure 1. Geometry of SST-SX Tank

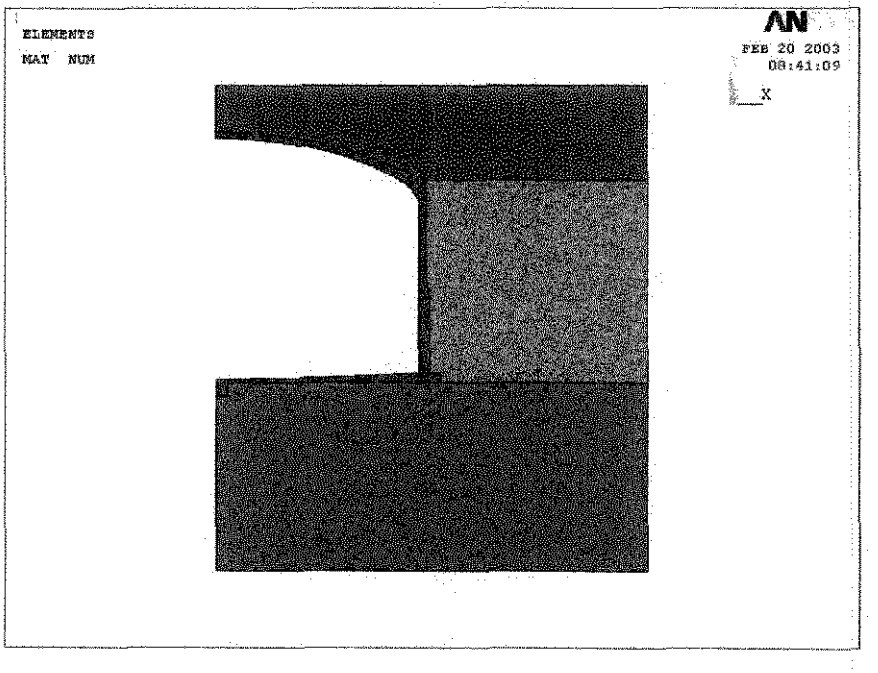

Figure 2. Soil Layers

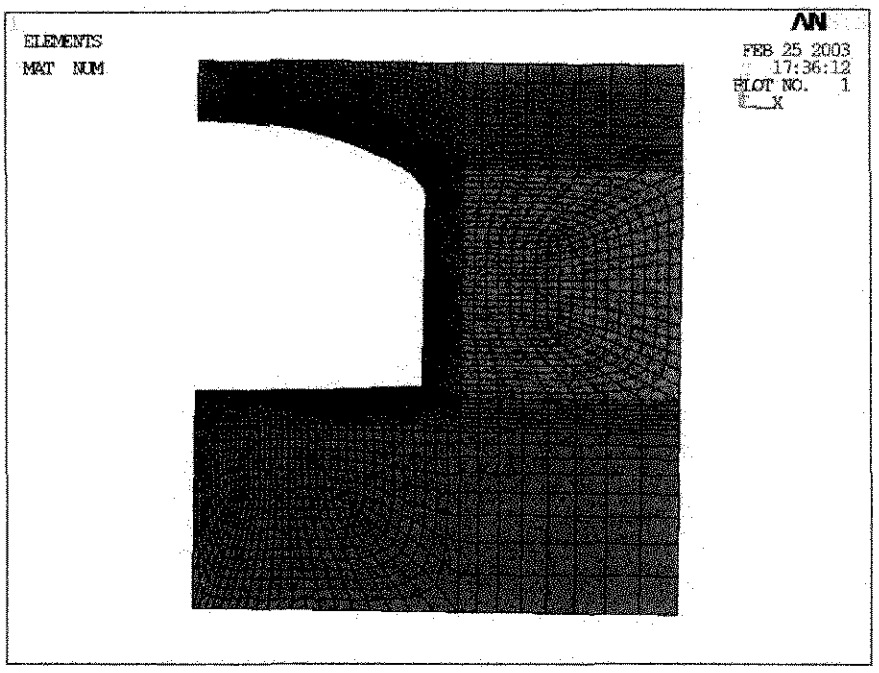

Figure 3. Finite element mesh, showing elements colored by material ID.

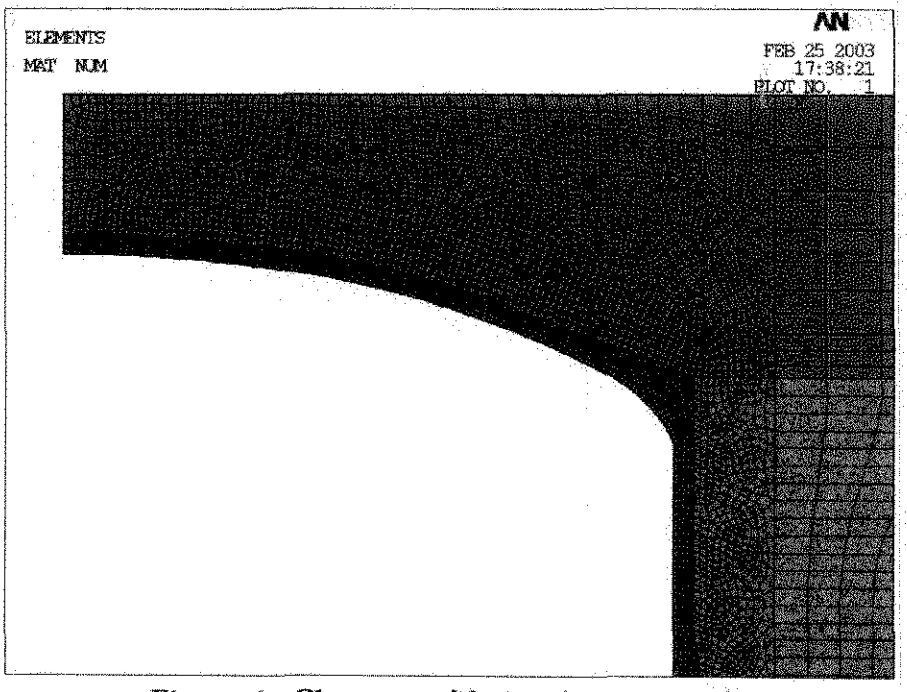

Figure 4. Close-up of finite element mesh.

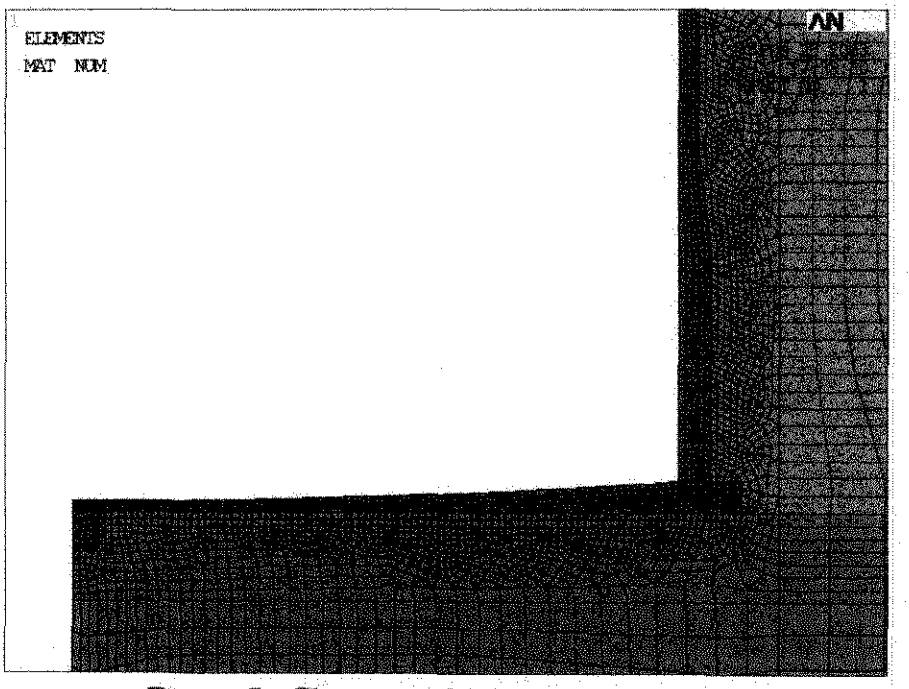

Figure 5. Close-up of finite element mesh.

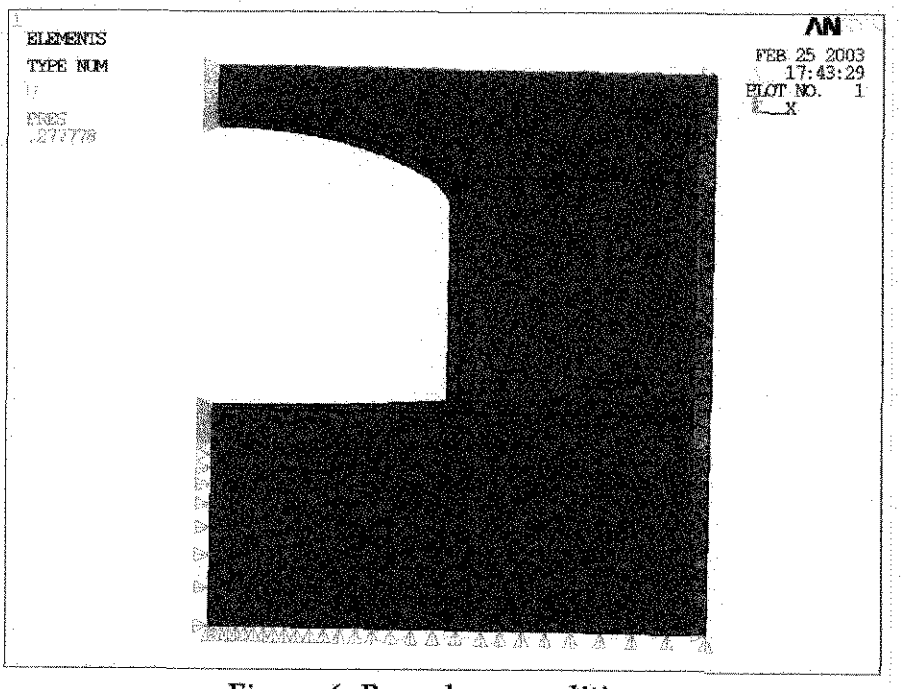

Figure 6. Boundary conditions

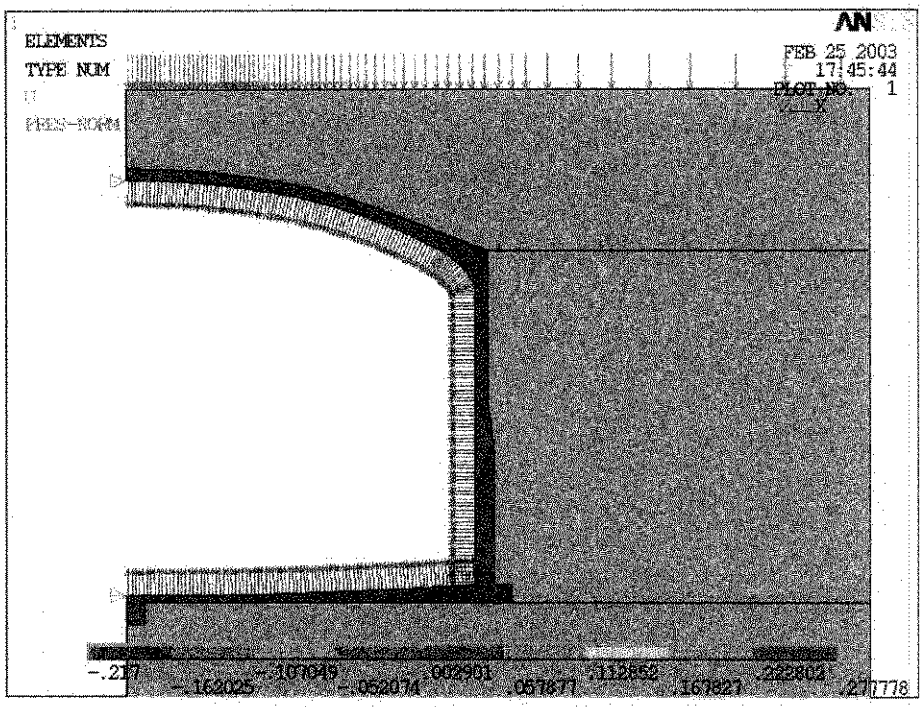

Figure 7. Uniform and vacuum load for SST-SX tanks

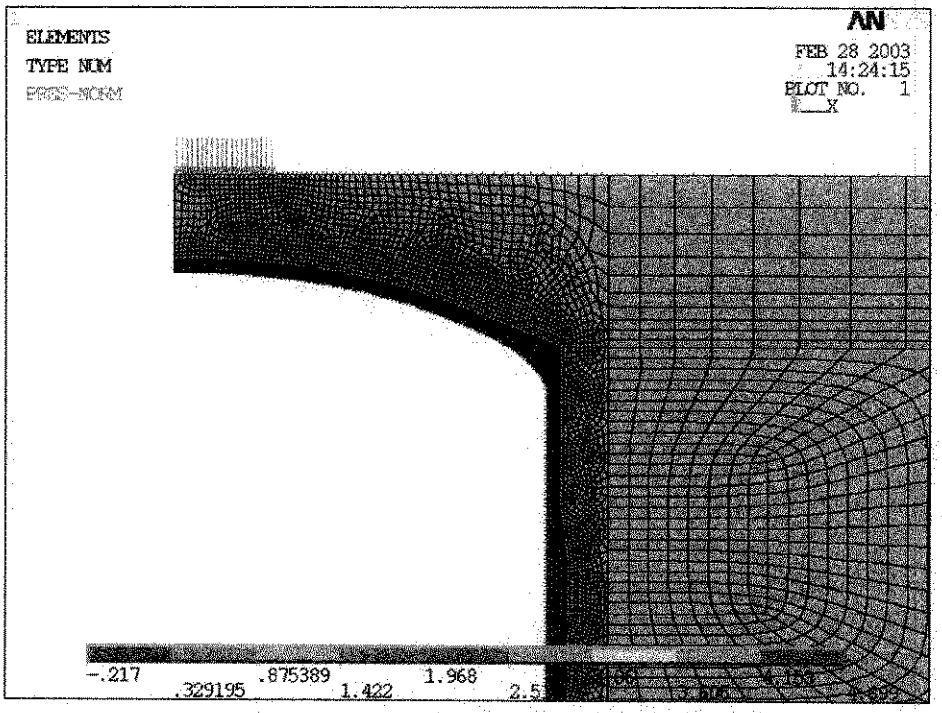

Figure 8. Concentrated load for SST-SX tanks

4.0 RESULTS

The solution can be obtained by running the master input macro **sst_sx.mac** (see attachment), which loads the macro defining the parameters, creates the tank/soil geometry and finite element mesh, applies loads, and defines the material properties.

Figures 9 and 10 summarize the displacement response due to AOR loads identified in Section 3. The peak displacement of the soil mass is 2.02 inches, and this occurs at grade far away from the tank. The peak tank displacement is 1.49 inches, at the dome apex. Figures 11 and 12 show exaggerated views of the tank/soil displacement.

The von Mises equivalent stress contours are presented in Figures 13 and 14. The peak equivalent stress in the tank is approximately 2.7 ksi, and this occurs at the joint of tank wall and slab. The hoop stress of the tank is shown in Figure 15. The maximum hoop stress is about 508 psi at haunch region, and the minimum hoop stress is -738 psi at wall/slab joint.

Force and moment resultants are calculated in **pst_proc_sx.mac**. In order for **pst_proc_sx.mac** to generate correct results, the tank has to be map meshed. The mapped mesh results in a set of nodes aligned in a straight line, creating a cross section for section force and moment evaluation. Once the cross section nodes and elements attached to one side of the nodes are selected, the macro **get_res.mac** then calculated the nodal forces, determined the location of the neutral axis, and evaluated the moment about the neutral axis. The force and moment per unit length are calculated according to the radius of the neutral axis. Because there is no direct hoop force output for 2D elements, the section hoop force is calculated in macro **get_hpfrc.mac**. The nodal hoop stresses are retrieved and averaged over thickness, hoop force over meridional length is then obtained from the averaged nodal hoop stress and wall thickness. Figures 16 to 18 show the axial force, shear force, hoop force, and moment, respectively. The wall/slab joint sees the most severe loading, with maximum axial force of about 126 kip/ft, maximum shear force of 57 kip/ft, and maximum moment of 2154 kip-in/ft. Maximum hoop force of 144 kip/ft occurred at haunch region.

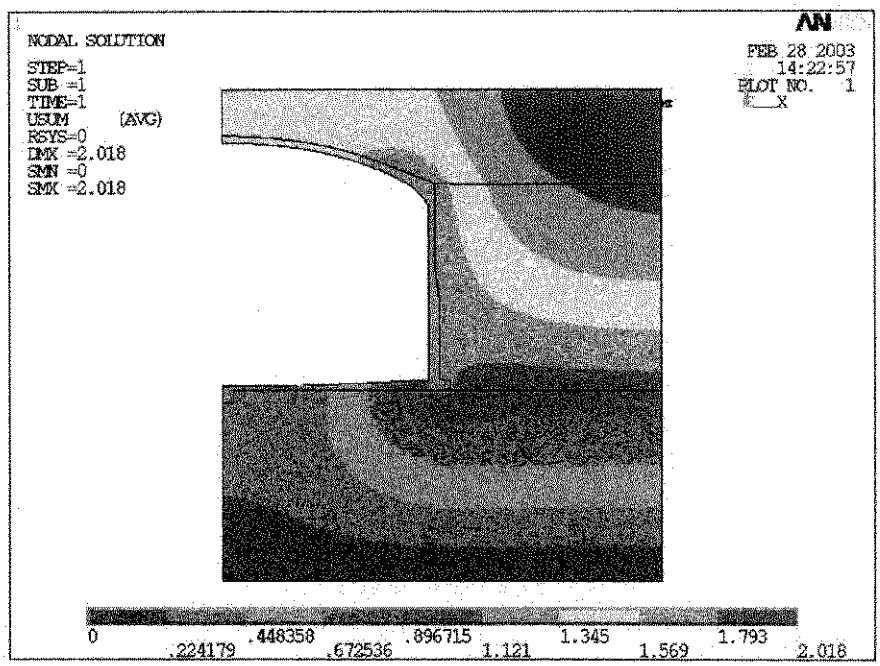

Figure 9. Total displacement contour of soil and tank

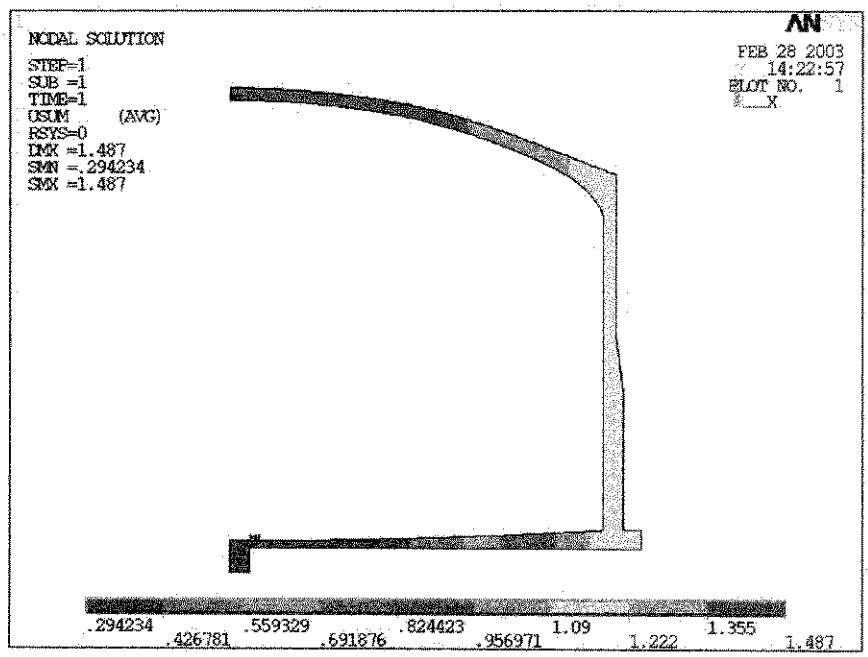

Figure 10. Total displacement contour of tank

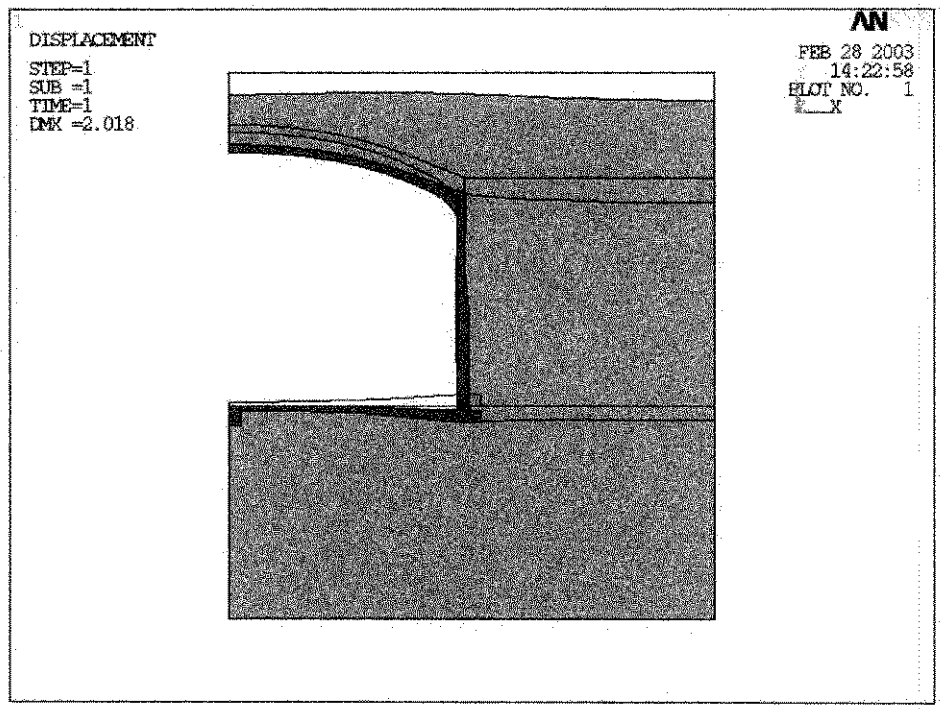

Figure 11. Deformed shape of soil

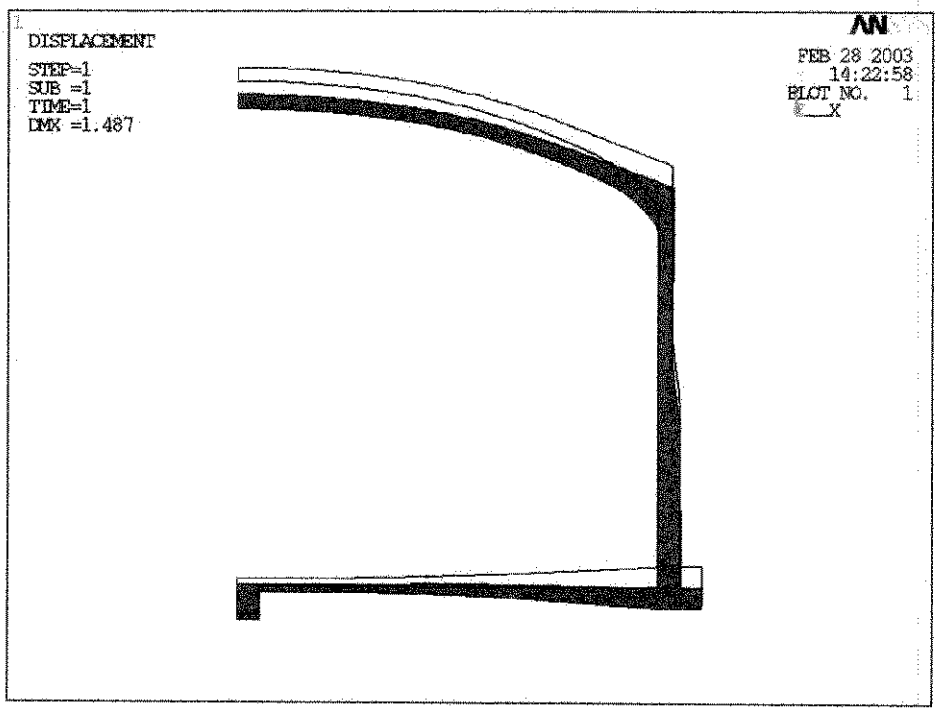

Figure 12. Deformed shape of tank

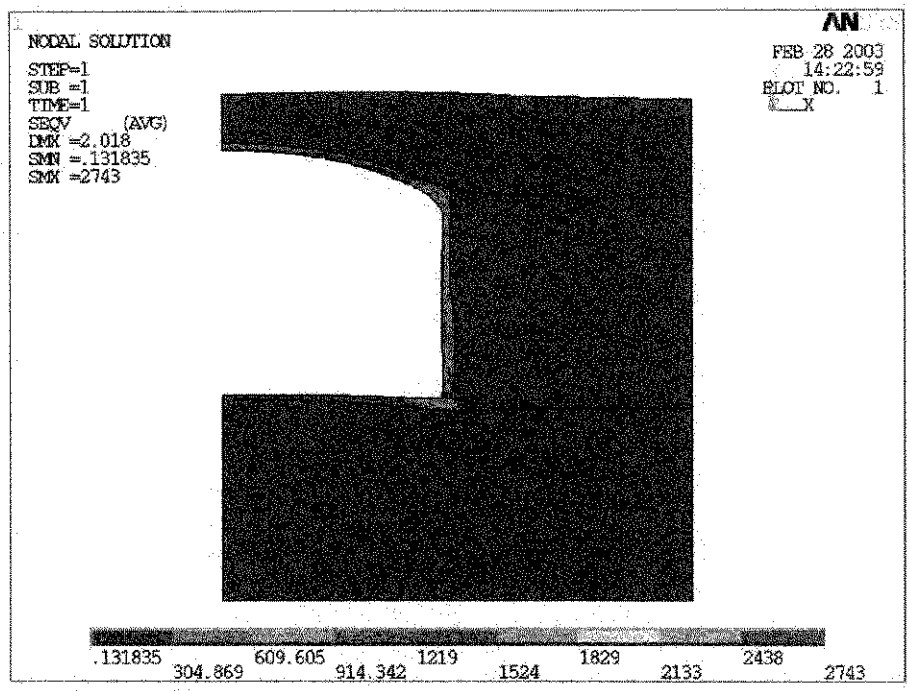

Figure 13. Equivalent stress contours of tank and soil (psi).

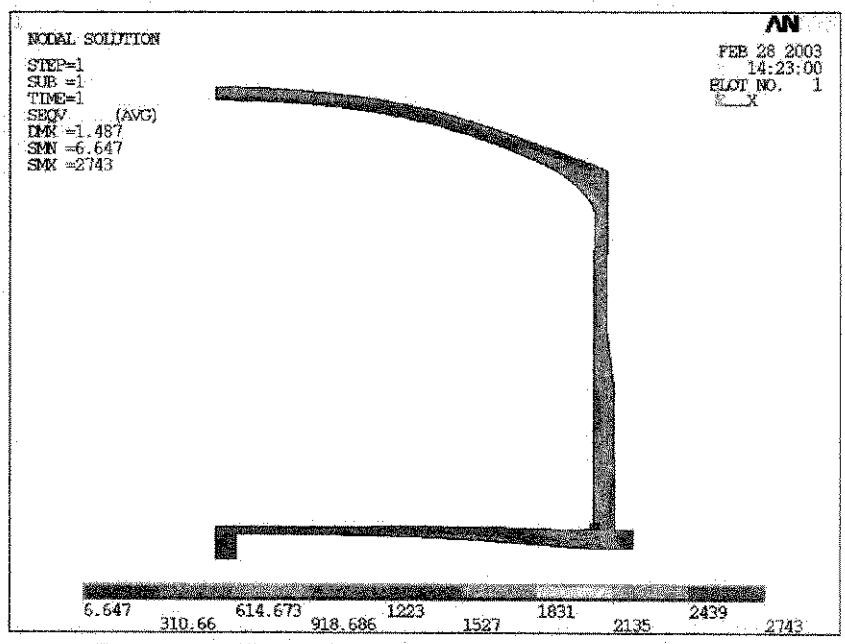

Figure 14. Equivalent stress contours of tank (psi).

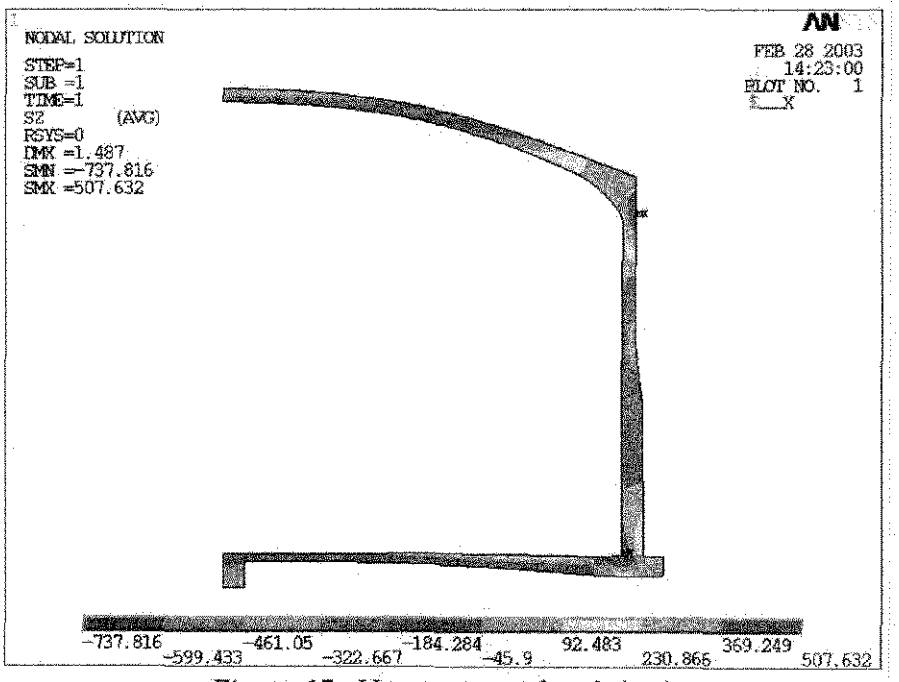

Figure 15. Hoop stress of tank (psi)

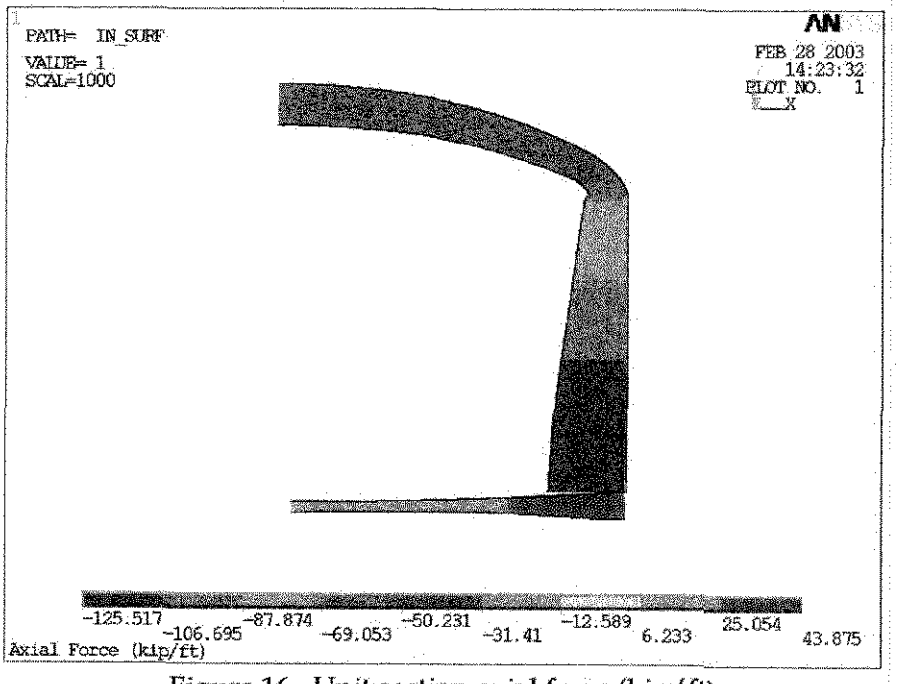

Figure 16. Unit section axial force (kip/ft)

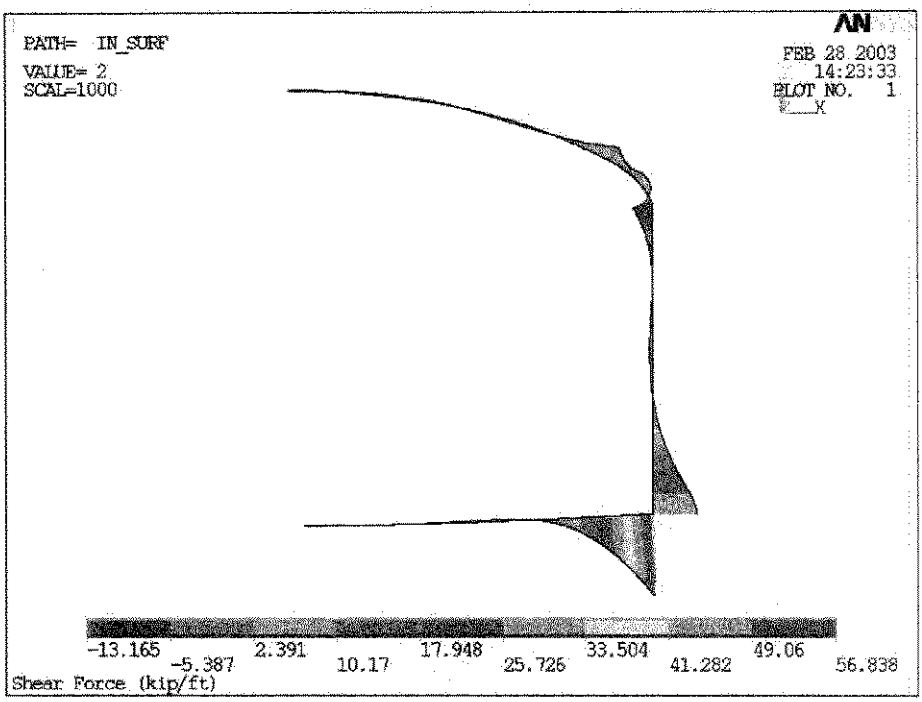

Figure 17. Unit section shear force (kip/ft)

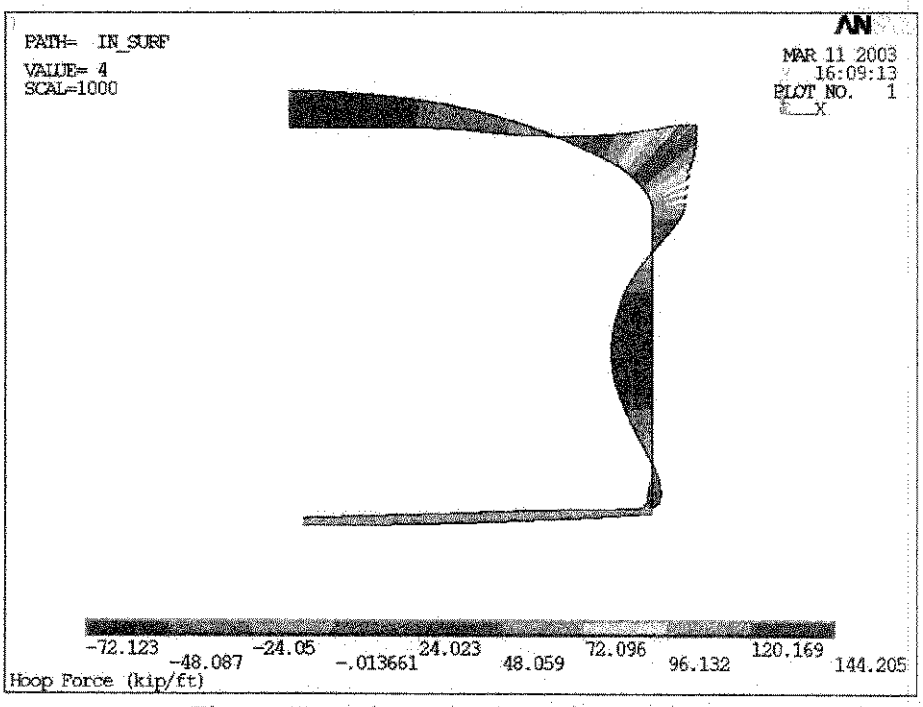

Figure 18. Unit section hoop force (kip/ft)

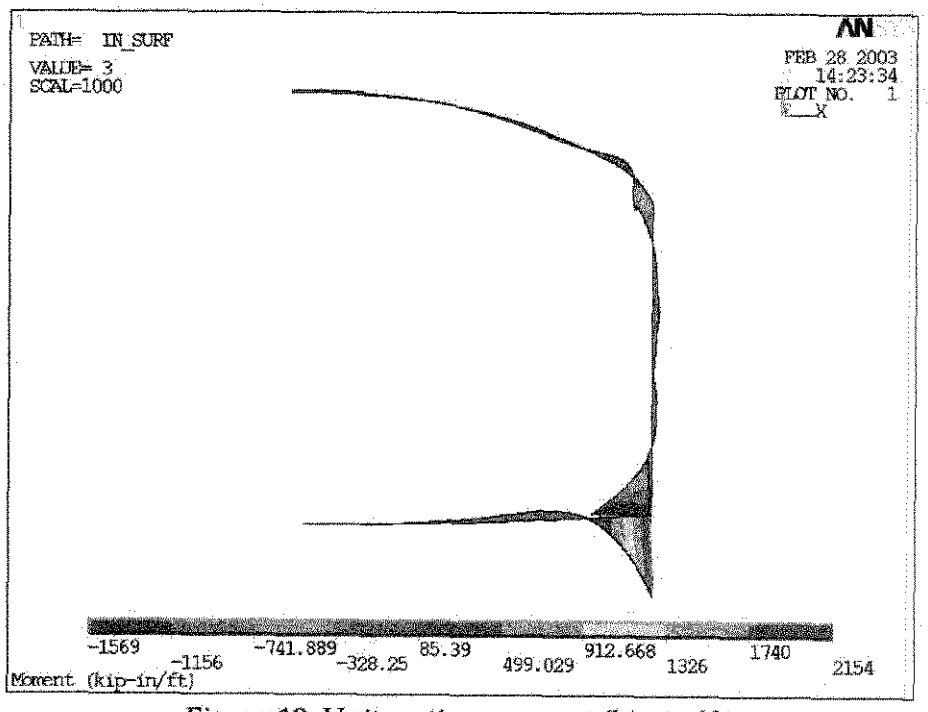

Figure 19. Unit section moment (kip-in/ft)

5.0 CONCLUSIONS

The simplified linear parametric model is capable of giving a quick estimation of tank behavior under AOR loads. A sample calculation demonstrates the use of the parametric model for tank SST-SX, and provides examples of the types of inputs that can be defined and the types of outputs that can be obtained. The parametric model can be used effectively to evaluate the tank response to a broad range of loading conditions and material properties.

6.0 REFERENCES

[Ref_1] ANSYS 7.0 General-Purpose Finite Element Analysis Program, ANSYS Inc.

[Ref_2] M&D Professional Services, "Dome Load Evaluation for Hanford 241-C Farm 100-Series Tanks", Document Number RPP-14249, January 14, 2003.

[Ref_3] Statement of Work, Requisition #92879, "Development of ANSYS Finite Element Models for SST and DST Tanks," Revision 0, October 14, 2002.

[Ref_4] Drawing H-2-39511, September 2, 1953

7.0 ATTACHMENTS AND APPENDICES

sst_sx.mac

```
!--Create cross section of SST SX tank
finish
/clear
/prep7

/INPUT,'parm_sx','mac'

!--Create dome
/TRIAD,RTOP
k,1,
wpcsys,-1,0
wpoff,,dm_r1,
csys,4
k
*get,k_max,kp,,num,max
*get,x_loc,kp,k_max,loc,x
*get,y_loc,kp,k_max,loc,y
k,,,dm_r2-dm_r1
k,,x_loc-dm_dr1,y_loc-dm_oh1
k,,x_loc-dm_dr3-dm_dr1,y_loc-dm_oh2
k,,x_loc-tk_or1,y_loc-hnch_h1

*get,x_loc,kp,3,loc,x
*get,y_loc,kp,3,loc,y
k,,x_loc-dm_dr2,y_loc-dm_ih1
*get,x_loc,kp,7,loc,x
*get,y_loc,kp,7,loc,y
k,,x_loc-dm_dr4,y_loc-dm_ih2
*get,x_loc,kp,8,loc,x
*get,y_loc,kp,8,loc,y
k,,x_loc-hnch_dr3,y_loc-hnch_h3
*get,x_loc,kp,9,loc,x
*get,y_loc,kp,9,loc,y
k,,x_loc-hnch_dr4,y_loc-hnch_h4

*get,x_loc,kp,6,loc,x
*get,y_loc,kp,6,loc,y
k,,x_loc,y_loc-hnch_h2

*get,x_loc,kp,11,loc,x
*get,y_loc,kp,11,loc,y
k,,x_loc,y_loc-tk_h1

*get,x_loc,kp,12,loc,x
*get,y_loc,kp,12,loc,y
k,,x_loc-(tk_t2-tk_t1),y_loc-tk_h2
```

```
*get,x_loc,kp,13,loc,x
*get,y_loc,kp,13,loc,y
k,,x_loc,y_loc-tk_h3

*get,x_loc,kp,14,loc,x
*get,y_loc,kp,14,loc,y
k,,x_loc-slb_dr,y_loc

*get,x_loc,kp,15,loc,x
*get,y_loc,kp,15,loc,y
k,,x_loc,y_loc-slb_t1

*get,x_loc,kp,3,loc,x
*get,y_loc,kp,16,loc,y
k,,x_loc-slb_dr2,y_loc

*get,x_loc,kp,17,loc,x
*get,y_loc,kp,17,loc,y
k,,x_loc,y_loc-slb_dt1

*get,x_loc,kp,3,loc,x
*get,y_loc,kp,18,loc,y
k,,x_loc,y_loc

*get,x_loc,kp,3,loc,x
*get,y_loc,kp,19,loc,y
k,,x_loc,y_loc+slb_dt1+slb_dt2+slb_dt3

*get,x_loc,kp,10,loc,x
*get,y_loc,kp,10,loc,y
k,,x_loc,y_loc-tk_h4+slb_dh2

lstr,2,3
larc,2,4,1,dm_r1
larc,4,5,1,dm_r3
larc,3,7,1,dm_r2
larc,7,8,1,dm_r4
lstr,5,6
larc,8,9,1,hnch_r1
larc,9,10,1,hnch_r2
lstr,6,11
lstr,11,12
lstr,12,13
lstr,13,14
lstr,14,15
lstr,15,16
lstr,16,17
lstr,17,18
lstr,18,19
lstr,19,20
```

```
larc,20,21,3,liner_r1
lstr,10,21
al,all

*get,x_loc,kp,21,loc,x
*get,y_loc,kp,21,loc,y
k,,x_loc-slb_dr3,y_loc

*get,x_loc,kp,22,loc,x
*get,y_loc,kp,21,loc,y
k,,x_loc-slb_dr4,y_loc-slb_dh

*get,x_loc,kp,20,loc,x
*get,y_loc,kp,20,loc,y
k,,x_loc,y_loc-slb_dt3

lstr,21,22
larc,23,24,3,slb_r1
lstr,23,14
lsel,s,,,22,23
asel,s,,,1
asbl,all,all

lsel,none
lstr,21,23
*get,l_num,line,,num,min
asel,s,,,3
lsel,s,,,l_num
asbl,all,all

allsel
lsel,none
lstr,10,11
*get,l_num,line,,num,min
asel,s,,,4
lsel,s,,,l_num
asbl,all,all

allsel
lwplan,-1,7
asbw,5

wpcsys,-1,0
kwpave,2
wpoff,,depth
csys,4
rectng,0,-soil_r,0,-soil_h,
allsel
aovlp,all
adele,7,,,1
```

```
allsel
wpcsys,-1,0
wprot,,90
cswpla,11,0
cswpla,12,1

kwpave,2
wprot,,90
wprot,,,90
off_set1=5*12
off_set2=3*12
wpoff,,,-tk_or1-off_set1
asbw,8
kwpave,19
wprot,,90
wpoff,,,-off_set2
asbw,5
asbw,7

csys,0
arsym,x,all,,,,1,0
asel,s,loc,x,0,-99999
adele,all,,,1
allsel
numcmp,all
wpcsys,-1,0
wprot,,,90
kwpave,35
wpoff,,,cload_1
lsbw,41

!--cut soil for different soil properties
kwpave,20
wprot,,90
asbw,8
asbw,9
kwpave,11
asbw,10
asbw,12
wprot,,-90

!--Set Elelment type, real constants, and material properties
r_liner=1
r,1,liner_t

mat_liner=1
mat_tank=2
mat_tsoil=3 !for top soil
mat_msoil=4     !for mid soil
mat_bsoil=5 !for bottom soil
```

```
type_liner=1
type_tank=2
type_soil=3

et,type_liner,shell61
et,type_tank,plane42
et,type_soil,plane42

keyopt,2,3,1
keyopt,3,3,1

![1]                steel (for liner)

mp,ex,mat_liner,steel_ex
mp,dens,mat_liner,steel_dens
mp,prxy,mat_liner,steel_prxy
mp,alpx,mat_liner,steel_alpx
mp,kxx,mat_liner,steel_kx
mp,c,mat_liner,steel_c

![2]                structural concrete
mp,ex,mat_tank,conc_ex
mp,dens,mat_tank,conc_dens
mp,prxy,mat_tank,conc_prxy
mp,alpx,mat_tank,conc_alpx
mp,kxx,mat_tank,conc_kx
mp,c,mat_tank,conc_c


![3]                top soil
mp,ex,mat_tsoil,tsoil_ex
mp,dens,mat_tsoil,tsoil_dens
mp,prxy,mat_tsoil,tsoil_prxy

![4]                mid soil
mp,ex,mat_msoil,msoil_ex
mp,dens,mat_msoil,msoil_dens
mp,prxy,mat_msoil,msoil_prxy

![5]                mid soil
mp,ex,mat_bsoil,bsoil_ex
mp,dens,mat_bsoil,bsoil_dens
mp,prxy,mat_bsoil,bsoil_prxy


!---Meshing

!--liner
lsel,s,,,2,13,11
cm,l_liner,line
type,type_liner
```

```
mat,mat_liner
real,r_liner

esize,liner_size
!lmesh,all

!-- tank mesh
allsel
asel,u,,,7,11
asel,u,,,5
asel,u,,,13,14
allsel,below,area
kwpave,10
wprot,,90
asbw,2
kwpave,13
wprot,,-90
asbw,15
kwpave,7
asbw,16
kwpave,10
asbw,17
wprot,,90
kwpave,15
asbw,3
kwpave,16
asbw,19
adele,1,,,1
lcomb,4,5
cm,a_tank,area
esize,tank_size
type,type_tank
mat,mat_tank
lsel,s,,,30,32
lccat,all
lsel,s,,,28,29
lccat,all
lsel,s,,,18,19
lccat,all
lsel,s,,,20,21
lccat,all
lsel,s,,,14,16
lccat,all
lsel,s,,,52,57,5
lccat,all
lsla
mshkey,1
amesh,all

!--delete concat lines
CM,_Y,LINE
```

```
*SET,_Z1,LSINQR(0,13)
*IF,_z1,ne,0,then
LSEL,R,LCCA
*SET,_Z2,LSINQR(0,13)
LDELE,ALL
*SET,_Z3,_Z1-_Z2
*IF,_Z3,NE,0,THEN
CMSEL,S,_Y
CMDELE,_Y
*ENDIF
*ELSE
CMSEL,S,_Y
CMDELE,_Y
*ENDIF

!-- soil mesh
asel,s,,,7,11
asel,a,,,5
asel,a,,,13,14
cm,a_soil,area
lsla
esize,soil_esize
lesize,43,,,soil_lsize1
lesize,42,,,soil_lsize6,.25
lesize,25,,,soil_lsize6,.25
lesize,40,,,12,5

lesize,46,,,10,.25
lesize,50,,,35
lesize,38,,,7

lesize,47,,,10,.25
lesize,51,,,15
lesize,48,,,7


mopt,trans,1.25
mopt,expnd,1.25

lesize,37,,,soil_lsize3,.5
lesize,34,,,soil_lsize3,.5
lesize,33,,,soil_lsize3,.5
lesize,45,,,soil_lsize3,2
lesize,49,,,soil_lsize3,2
lesize,26,,,soil_lsize5,.3
lesize,35,,,soil_lsize5,.3
lesize,24,,,soil_lsize5,.3
lesize,23,,,soil_lsize1,4

type,type_soil
mat,mat_tsoil
```

```
asel,s,,,8
mshkey,0
mopt,expnd,1.1
mopt,trans,1.1
amesh,all
asel,s,,,11
mshkey,1
amesh,all

mat,mat_msoil
asel,s,,,13,14
mshkey,0
amesh,all

mat,mat_bsoil
mopt,expnd,1.2
mopt,trans,1.2
asel,s,,,10
amesh,all

asel,s,,,5,9,2
mshkey,1
amesh,all

/pnum,type,1
/num,1

allsel

set_load_sx
allsel
/solu
solve
```

parm_sx.mac

```
!--Define parameters for SST-SX tank
!--dimensions are in INCH and DEG

dm_r1=1155  !inch, radius of outer inboard dome surface
dm_r2=1140  !inch, radius of inner inboard dome surface
dm_r3=804   !inch, radius of outer outboard dome surface
dm_r4=720   !inch, radius of inner outboard dome surface
dm_theta1=9.084722  !deg, angle of outer inboard dome surface
dm_theta2=9.084722  !deg, angle of inner inboard dome surface
dm_theta3=12.05972  !deg, angle of outer outboard dome surface
dm_theta4=18.581944 !deg, angle of inner outboard dome surface
dm_oh1=14.5  !vrtcal dist. from dome top to end of out radius 1
dm_oh2=58.5  !vrtcal dist. from dome top to end of out radius 2
dm_ih1=14.3125 !vrtcal dist. from dome top to end of inner radius 1
dm_ih2=73.3125 !vrtcal dist. between end of inner radius 1 and 2
dm_dr1=182.375
dm_dr2=180
dm_dr3=163.0625 !horizontal span of outer radius 2
dm_dr4=220.625  !horizontal span of inner radius 2


hnch_r1=120 !inch, big haunch radius
hnch_r2=26.5      !inch, small haunch radius
hnch_theta1=30.09583    !deg, angle of big haunch radius
hnch_theta2=32.2375     !deg, angle of big haunch radius
hnch_h1=104.9375  !vrtcl. dist between dome top and haunch corner
hnch_h2=54.0625   !vrtcl. dist between haunch corner and haunch bot.
hnch_h3=42.25     !vrtcl. span of big haunch radius
hnch_dr3=45.8125  !horizontal span of big haunch radius
hnch_h4=14.125    !vrtcl. span of small haunch radius
hnch_dr4=4.0625

tk_or1=465.5  !radius of out tank surface (top)
tk_t1=15   !top tank thickness
tk_t2=24   !bot. tank thickness
tk_h1=133 !vtcl dist between haunch bot. to start of tank slope
tk_h2=72  !vtcl dist of tank slope
tk_h3=170.625  !vtcl dist between end of slope to bot. of tank
tk_h4=387.875

slb_t1=23  !outer slab thickness
slb_dt1=30
slb_dt2=8
slb_dt3=2.75
slb_dr=22.5 !radius difference between out tank and slab
slb_dr2=24
slb_r1=569.82*12 !radius of top slab surface
```

```
slb_dr3=1
slb_dr4=-1  !=1 in drawing, simplied to 0
slb_dh=2.625
slb_dh2=14.875

liner_r1=569.59*12  !radius of bottom steel liner

depth=8.52*12
soil_r=80*12
soil_h=90*12

!---Parameters for materials
steel_ex=27.7e6   !elastic modulus [psi]
steel_prxy=0.3    !Poisson ratio
steel_alpx=6.38   !thermal expansion coefficient [microstrain/degree F]
steel_gamma=490   !unit weight [lbf/ft^3]
steel_kx=1        !thermal conductivity [BTU/hr/ft/degreeF]
steel_c=1         !specific heat [BTU/R-lbf/(in/sec^2)]
steel_alpx=steel_alpx*1e-6          !in/in/F
steel_dens=steel_gamma/1728/386     !lb-sec^2/in^4
steel_kx=steel_kx/3600/12           !BTU/sec-in-degreeF
steel_yield=36000 !yield strength [psi]

conc_ex=3.1e6     !elastic modulus [psi]
conc_prxy=0.2     !Poisson ratio
conc_alpx=6.38    !thermal expansion coefficient [microstrain/degree F]
conc_gamma=150    !unit weight [lbf/ft^3]
conc_kx=1         !thermal conductivity [BTU/hr/ft/degreeF]
conc_c=1          !specific heat [BTU/R-lbf/(in/sec^2)]
conc_alpx=conc_alpx*1e-6            !in/in/F
conc_dens=conc_gamma/1728/386 !lb-sec^2/in^4
conc_kx=conc_kx/3600/12       !BTU/sec-in-degreeF
conc_open=0.1     !shear transfer coefficient for open crack
conc_closed=0.98  !shear transfer coefficient for closed crack
conc_crush=3000   !uniaxial crushing stress [psi]
conc_crack=0.1*conc_crush     !tensile cracking stress [psi]

!--bottom soil
bsoil_ex=20e3     !elastic modulus [psi]
bsoil_prxy=0.27   !Poisson ratio
bsoil_alpx=0            !thermal expansion coefficient [me/F]
bsoil_gamma=125   !unit weight [lbf/ft^3]
bsoil_kx=1        !thermal conductivity [BTU/hr/ft/F]
bsoil_c=1         !specific heat [BTU/R/(lbf-sec^2/in)]
bsoil_cohesion=0  !drucker-prager constant (assume small number) [psi]
bsoil_friction=35.4!internal friction angle [deg]
bsoil_dilat=35.4  !dilatancy angle [deg]
bsoil_alpx=bsoil_alpx*1e-6    !in/in/F
bsoil_dens=bsoil_gamma/1728/386     !lb-sec^2/in^4
bsoil_kx=bsoil_kx/3600/12           !BTU/sec-in-degreeF
```

```
!--mid soil
msoil_ex=13e3
msoil_prxy=0.27
msoil_dens=125/1728/386

!-top soil
tsoil_ex=7e3
tsoil_prxy=0.27
tsoil_dens=125/1728/386

!---Element size control
liner_size=5
tank_size=5
soil_esize=5
soil_lsize1=20  !horizontal division for c-load area
soil_lsize2=50    !vertical division for corner soil block (in)
soil_lsize3=8   !horizontal division for corner soil block
soil_lsize4=30  !vertical division for corner soil block (out)
soil_lsize5=8   !vertical line division for bottom soil block
soil_lsize6=40  !horizontal division of inner bot. soil block


!---liner thickness
liner_t=3/8

!--Load
p_uniform=40/144
ff=200000
cload_l=10*12

vac_pres=-0.217  !-6" w.g. vacuum
```

set_load_sx.mac

```
finish
/prep7
!--set BCs
csys,0
ksel,s,loc,x,soil_r
lslk,,1
nsll,,1
d,all,ux,0

allsel
*get,k_y,kp,31,loc,y
ksel,s,loc,y,k_y
lslk,,1
nsll,,1
d,all,uy,0

csys,0
nsel,s,loc,x,0
d,all,ux,0

lsel,s,,,37
lsel,a,,,42,43
nsll,,1
esln
sf,all,pres,p_uniform

p_cload=ff/(3.14159*cload_l**2)
lsel,s,,,43
nsll,,1
sf,all,pres,p_cload+p_uniform
allsel

acel,,386

!Apply -6" w.g. to dome
lsel,s,,,28,29
lsel,a,,,4
lsel,a,,,18,19
lsel,a,,,55,59,4
lsel,a,,,62,63
nsll,,1
sf,all,pres,vac_pres

allsel
finish
/filname,sst_sx
save
```

pst_proc_sx.mac

```
finish
/clear
resume,sst_sx,db
/post1
file,sst_sx
set,last
/sys,del *.png

/COLOR,NUM,CYAN,1
/COLOR,NUM,BMAG,2
/COLOR,NUM,YGRE,3
/COLOR,NUM,CBLU,4
/COLOR,NUM,MRED,5
/COLOR,NUM,GREE,6
/COLOR,NUM,ORAN,7
/COLOR,NUM,MAGE,8
/COLOR,NUM,YGRE,9
/COLOR,NUM,BLUE,10
/COLOR,NUM,GCYA,11

!------total disp. contour of soil
/dscale,,1
allsel
/auto
plnsol,u,sum
plpng

!-----total disp. contour of tank
esel,s,type,,2
/auto
plnsol,u,sum
plpng

!-----deformed shape of soil
/edge,,1
/dscale
allsel
pldisp,2
plpng

!-----deformed shape of tank
esel,s,type,,2
/rep
plpng

!-----von mises stress of soil
/edge
allsel
plnsol,s,eqv
```

```
plpng

!-----von mises stress of tank
esel,s,type,,2
/rep
plpng

!-----hoop stress of tank
plnsol,s,z
plpng

allsel

!--------------------SECTION FORCE/MOMENT

*dim,path_nd,,1000       !path node definition
*dim,path_fa,,1000       !axial force
*dim,path_ft,,1000       !transverse force
*dim,path_fh,,1000       !hoop force
*dim,path_mz,,1000       !moment

csys,0

pstart=0  !starting point of consequent path points

!=========================dome region
lsel,s,,,30,32
nsll,,1
cm,nd_out,node

lsel,s,,,28,29
nsll,,1
cm,nd_in,node

!--unselect end nodes
cmsel,s,nd_out

*get,x_min,node,,mnloc,x
nsel,u,loc,x,x_min-.1,x_min+.1
cm,nd_out,node

cmsel,s,nd_in
*get,x_min,node,,mnloc,x
nsel,u,loc,x,x_min-.1,x_min+.1
cm,nd_in,node


!--reorder nodes according x-coord.
cmsel,s,nd_out
*get,out_num,node,,count
*dim,nodeout,,out_num
```

```
*do,i,1,out_num
    cmsel,s,nd_out
    *get,x_min,node,,mnloc,x
    nsel,r,loc,x,x_min-.1,x_min+.1
    *get,ndnum,node,,num,min
    nodeout(i)=ndnum
    cmsel,s,nd_out
    nsel,u,,,ndnum
    cm,nd_out,node
*enddo

cmsel,s,nd_in
*get,in_num,node,,count
*dim,nodein,,in_num
*do,i,1,in_num
    cmsel,s,nd_in
    *get,x_min,node,,mnloc,x
    nsel,r,loc,x,x_min-.1,x_min+.1
    *get,ndnum,node,,num,min
    nodein(i)=ndnum
    cmsel,s,nd_in
    nsel,u,,,ndnum
    cm,nd_in,node
*enddo

asel,s,,,6
lsla
nsla,,1
cm,dome_nd,node

!--for line equation for each pair of in/out nodes
*do,ii,1,in_num
    nsel,s,,,nodeout(ii)
    nsel,a,,,nodein(ii)
    path_nd(pstart+ii)=nodein(ii)
    *get,x_out,node,nodeout(ii),loc,x
    *get,y_out,node,nodeout(ii),loc,y
    *get,x_in,node,nodein(ii),loc,x
    *get,y_in,node,nodein(ii),loc,y
    nwpla,-1,nodeout(ii),nodein(ii)
    csys,4
    cmsel,s,dome_nd
    nsel,r,loc,y,-1,1
    cm,ntemp,node
    esln
    esel,r,type,,2
    nsle
    nsel,r,loc,y,-1,99999
    esln,,1
    cm,etemp,elem
    cmsel,s,ntemp
```

```
    cmsel,s,etemp
    csys,0
    get_res
    theta=atan((y_out-y_in)/(x_out-x_in))

    path_fa(pstart+ii)=unit_fsumx*sin(theta)-unit_fsumy*cos(theta)
    path_ft(pstart+ii)=unit_fsumx*cos(theta)+unit_fsumy*sin(theta)
    path_mz(pstart+ii)=unit_mz

    cmsel,s,ntemp
    ttt=sqrt((x_out-x_in)**2+(y_out-y_in)**2)
    get_hpfrc
    path_fh(pstart+ii)=hp_f

*enddo

pstart=pstart+in_num

!====================haunch region
lsel,s,,,20,21
nsll,,1
cm,nd_out,node

lsel,s,,,18,19
nsll,,1
cm,nd_in,node

!--unselect end nodes
cmsel,s,nd_out
*get,y_max,node,,mxloc,y
nsel,u,loc,y,y_max-.1,y_max+.1
cm,nd_out,node

cmsel,s,nd_in
*get,y_max,node,,mxloc,y
nsel,u,loc,y,y_max-.1,y_max+.1
cm,nd_in,node

!--reorder nodes according y-coord.
cmsel,s,nd_out
*get,out_num,node,,count
*dim,nodeout,,out_num
*do,i,1,out_num
cmsel,s,nd_out
*get,y_max,node,,mxloc,y
nsel,r,loc,y,y_max-.1,y_max+.1
*get,ndnum,node,,num,min
nodeout(i)=ndnum
cmsel,s,nd_out
nsel,u,,,ndnum
cm,nd_out,node
```

```
*enddo

cmsel,s,nd_in
*get,in_num,node,,count
*dim,nodein,,in_num
*do,i,1,in_num
    cmsel,s,nd_in
    *get,y_max,node,,mxloc,y
    nsel,r,loc,y,y_max-.1,y_max+.1
    *get,ndnum,node,,num,min
    nodein(i)=ndnum
    cmsel,s,nd_in
    nsel,u,,,ndnum
    cm,nd_in,node
*enddo

asel,s,,,4
lsla
nsla,,1
cm,hnch_nd,node

!--for line equation for each pair of in/out nodes
*do,ii,1,in_num
    nsel,s,,,nodeout(ii)
    nsel,a,,,nodein(ii)
    path_nd(pstart+ii)=nodein(ii)
    *get,x_out,node,nodeout(ii),loc,x
    *get,y_out,node,nodeout(ii),loc,y
    *get,x_in,node,nodein(ii),loc,x
    *get,y_in,node,nodein(ii),loc,y
    nwpla,-1,nodeout(ii),nodein(ii)
    csys,4
    cmsel,s,hnch_nd
    nsel,r,loc,y,-1,1
    cm,ntemp,node
    esln
    esel,r,type,,2
    nsle
    nsel,r,loc,y,-1,99999
    esln,,1
    cm,etemp,elem
    cmsel,s,ntemp
    cmsel,s,etemp
    csys,0
    get_res
    theta=atan((y_out-y_in)/(x_out-x_in))

    path_fa(pstart+ii)=unit_fsumx*sin(theta)-unit_fsumy*cos(theta)
    path_ft(pstart+ii)=unit_fsumx*cos(theta)+unit_fsumy*sin(theta)
    path_mz(pstart+ii)=unit_mz
```

```
    cmsel,s,ntemp
    ttt=sqrt((x_out-x_in)**2+(y_out-y_in)**2)
    get_hpfrc
    path_fh(pstart+ii)=hp_f

*enddo

lsel,s,,,20,21
nsll,,1
cm,nd_out,node

lsel,s,,,18,19
nsll,,1
cm,nd_in,node
cmsel,s,nd_out
cmsel,a,nd_in

pstart=pstart+in_num
!==========================wall region
lsel,s,,,14,16
nsll,,1
cm,nd_out,node

lsel,s,,,62,63
lsel,a,,,4
nsll,,1
cm,nd_in,node

!--unselect end nodes
cmsel,s,nd_out
*get,y_max,node,,mxloc,y
*get,y_min,node,,mnloc,y
nsel,u,loc,y,y_max-.1,y_max+.1
!nsel,u,loc,y,y_min-.1,y_min+.1
cm,nd_out,node

cmsel,s,nd_in
*get,y_min,node,,mnloc,y
*get,y_max,node,,mxloc,y
nsel,u,loc,y,y_max-.1,y_max+.1
!nsel,u,loc,y,y_min-.1,y_min+.1
cm,nd_in,node

!--reorder nodes according y-coord.
cmsel,s,nd_out
*get,out_num,node,,count
*dim,nodeout,,out_num
*do,i,1,out_num
    cmsel,s,nd_out
    *get,y_max,node,,mxloc,y
    nsel,r,loc,y,y_max-.1,y_max+.1
```

```
    *get,ndnum,node,,num,min
    nodeout(i)=ndnum
    cmsel,s,nd_out
    nsel,u,,,ndnum
    cm,nd_out,node
*enddo

cmsel,s,nd_in
*get,in_num,node,,count
*dim,nodein,,in_num
*do,i,1,in_num
    cmsel,s,nd_in
    *get,y_max,node,,mxloc,y
    nsel,r,loc,y,y_max-.1,y_max+.1
    *get,ndnum,node,,num,min
    nodein(i)=ndnum
    cmsel,s,nd_in
    nsel,u,,,ndnum
    cm,nd_in,node
*enddo

asel,s,,,3
asel,a,,,17,20,3
lsla
nsla,,1
cm,wall_nd,node

!--for line equation for each pair of in/out nodes
*do,ii,1,in_num
    nsel,s,,,nodeout(ii)
    nsel,a,,,nodein(ii)
    path_nd(pstart+ii)=nodein(ii)
    *get,x_out,node,nodeout(ii),loc,x
    *get,y_out,node,nodeout(ii),loc,y
    *get,x_in,node,nodein(ii),loc,x
    *get,y_in,node,nodein(ii),loc,y
    nwpla,-1,nodeout(ii),nodein(ii)
    csys,4
    cmsel,s,wall_nd
    nsel,r,loc,y,-1,1
    cm,ntemp,node
    esln
    esel,r,type,,2
    nsle
    nsel,r,loc,y,-1,99999
    esln,,1
    cm,etemp,elem
    cmsel,s,ntemp
    cmsel,s,etemp
    csys,0
    get_res
```

```
    theta=atan((y_out-y_in)/(x_out-x_in))

    path_fa(pstart+ii)=unit_fsumx*sin(theta)-unit_fsumy*cos(theta)
    path_ft(pstart+ii)=unit_fsumx*cos(theta)+unit_fsumy*sin(theta)
    path_mz(pstart+ii)=unit_mz

    cmsel,s,ntemp
    ttt=sqrt((x_out-x_in)**2+(y_out-y_in)**2)
    get_hpfrc
    path_fh(pstart+ii)=hp_f

*enddo
pstart=pstart+in_num

!=========================slab region
lsel,s,,,57
nsll,,1
cm,nd_out,node

lsel,s,,,55
nsll,,1
cm,nd_in,node

!--unselect end nodes
cmsel,s,nd_out
*get,x_max,node,,mxloc,x

nsel,u,loc,x,x_max-.1,x_max+.1
cm,nd_out,node

cmsel,s,nd_in
*get,x_max,node,,mxloc,x
nsel,u,loc,x,x_max-.1,x_max+.1
cm,nd_in,node

!--reorder nodes according x-coord.
cmsel,s,nd_out
*get,out_num,node,,count
*dim,nodeout,,out_num
*do,i,1,out_num
    cmsel,s,nd_out
    *get,x_max,node,,mxloc,x
    nsel,r,loc,x,x_max-.1,x_max+.1
    *get,ndnum,node,,num,min
    nodeout(i)=ndnum
    cmsel,s,nd_out
    nsel,u,,,ndnum
    cm,nd_out,node
*enddo

cmsel,s,nd_in
```

```
*get,in_num,node,,count
*dim,nodein,,in_num
*do,i,1,in_num
    cmsel,s,nd_in
    *get,x_max,node,,mxloc,x
    nsel,r,loc,x,x_max-.1,x_max+.1
    *get,ndnum,node,,num,min
    nodein(i)=ndnum
    cmsel,s,nd_in
    nsel,u,,,ndnum
    cm,nd_in,node
*enddo

asel,s,,,16
lsla
nsla,,1
cm,slab_nd,node

!--for line equation for each pair of in/out nodes
*do,ii,1,in_num
    nsel,s,,,nodeout(ii)
    nsel,a,,,nodein(ii)
    path_nd(pstart+ii)=nodein(ii)
    *get,x_out,node,nodeout(ii),loc,x
    *get,y_out,node,nodeout(ii),loc,y
    *get,x_in,node,nodein(ii),loc,x
    *get,y_in,node,nodein(ii),loc,y
    nwpla,-1,nodeout(ii),nodein(ii)
    csys,4
    cmsel,s,slab_nd
    nsel,r,loc,y,-1,1
    cm,ntemp,node
    esln
    esel,r,type,,2
    nsle
    nsel,r,loc,y,-1,99999
    esln,,1
    cm,etemp,elem
    cmsel,s,ntemp
    cmsel,s,etemp
    csys,0
    get_res
    theta=3.14159/2

    path_fa(pstart+ii)=unit_fsumx*sin(theta)-unit_fsumy*cos(theta)
    path_ft(pstart+ii)=unit_fsumx*cos(theta)+unit_fsumy*sin(theta)
    path_mz(pstart+ii)=unit_mz

    cmsel,s,ntemp
    ttt=sqrt((x_out-x_in)**2+(y_out-y_in)**2)
    get_hpfrc
```

```
    path_fh(pstart+ii)=hp_f

*enddo

pstart=pstart+in_num

!=======Define path
allsel
dof,rotx
path,in_surf,pstart
*do,i,1,pstart
      ppath,i,path_nd(i)
        dnsol,path_nd(i),u,x,path_fa(i)
        dnsol,path_nd(i),u,y,path_ft(i)
        dnsol,path_nd(i),u,z,path_mz(i)
        dnsol,path_nd(i),rot,x,path_fh(i)
*enddo

AVPRIN,0,0,
!*
PDEF,1,U,X,AVG
/PBC,PATH, ,0
!*
AVPRIN,0,0,
!*
PDEF,2,U,Y,AVG
/PBC,PATH, ,0
!*
AVPRIN,0,0,
!*
PDEF,3,U,Z,AVG
/PBC,PATH, ,0

PDEF,4,rot,x,AVG
/PBC,PATH, ,0

/gresume,path_sx,plt

PLPAGM,1,1000,Blank
/title,Axial Force (kip/ft)
/rep
plpng

PLPAGM,2,1000,Blank
/title,Shear Force (kip/ft)

/rep
plpng

PLPAGM,3,1000,Blank
/title,Moment (kip-in/ft)
```

```
/rep
plpng

PLPAGM,4,1000,Blank
/title,Hoop Force (kip/ft)
/rep
plpng

!----Output path data to file
/sys,del path_sx.dat
*dim,pl,,pstart
ss=0
*do,i,1,pstart
     *get,path_x,path,,point,i,x
     *get,path_y,path,,point,i,y
     *if,i,gt,1,then
         ss=ss+sqrt((path_x-path_x0)**2+(path_y-path_y0)**2)
     *endif
     pl(i)=ss
     path_x0=path_x
     path_y0=path_y
*enddo

i=1
/output,path_sx,dat,,
*vwrite,pl(i),path_fa(i),path_ft(i),path_fh(i),path_mz(i)
(5e12.4)
/output
```

get_res.mac

```
cm,etemp,elem
cm,ntemp,node
*get,nelem,elem,,count
*get,nnode,node,,count

xx(1)=
yy(1)=
zz(1)=
ffx(1)=
ffy(1)=
ffz(1)=

*dim,xx,,nnode
*dim,yy,,nnode
*dim,zz,,nnode
*dim,ffx,,nnode
*dim,ffy,,nnode
*dim,ffz,,nnode

xmean=0
ymean=0
zmean=0

fsumx=0
fsumy=0
fsumz=0

cm,nn0,node
csys,0
*do,i,1,nnode
      *get,inode,node,,num,min
      nsel,s,,,inode
      xx(i)=nx(inode)
      yy(i)=ny(inode)
      zz(i)=nz(inode)
      cmsel,s,etemp
      fsum,0
      *get,ffx(i),fsum,fx
      *get,ffy(i),fsum,fy
      *get,ffz(i),fsum,fz
      xmean=xmean+xx(i)
      ymean=ymean+yy(i)
      zmean=zmean+zz(i)
      fsumx=fsumx+ffx(i)
      fsumy=fsumy+ffy(i)
      fsumz=fsumz+ffz(i)
      cmsel,s,nn0
      nsel,u,,,inode
      cm,nn0,node
```

```
*enddo

xmean=xmean/nnode
ymean=ymean/nnode
zmean=zmean/nnode

!get centroids
mmxx=0
mmyy=0
mmzz=0

cmsel,s,ntemp
cm,nn0,node
*do,i,1,nnode
      mmxx=mmxx+ffy(i)*(zz(i)-zmean)+ffz(i)*(yy(i)-ymean)
      mmyy=mmyy+ffx(i)*(zz(i)-zmean)+ffz(i)*(xx(i)-xmean)
      mmzz=mmzz+ffx(i)*(yy(i)-ymean)+ffy(i)*(xx(i)-xmean)
*enddo

fsumx=fsumx/1000     !kip
fsumy=fsumy/1000     !kip
mmzz=mmzz/1000       !kip-in

arc_length=3.14159*xmean*2
unit_fsumx=fsumx/arc_length*12 ! kip/ft
unit_fsumy=fsumy/arc_length*12 ! kip/ft
unit_mz=mmzz/arc_length*12     ! kip-in/ft
```

get_hpfrc.mac

```
!---This macro should be run after get_res.mac, xmean is calculated in
!   get_res.mac

cm,ntemp,node
*get,nnode,node,,count

csys,0

hp_f=0
sz_sum=0
nn=0
*do,i,1,nnode
      ndnxt=ndnext(nn)
      nsel,s,,,ndnxt
        esln
        esel,r,type,,2
        cm,etemp,elem
        *get,s_z,node,ndnxt,s,z
        sz_sum=sz_sum+s_z
        cmsel,s,ntemp
        nn=ndnxt
*enddo

sz_sum=sz_sum/nnode

hp_f=sz_sum*ttt/1000*12  !kip/ft
```

plpng.mac

```
/SHOW,PNG
PNGR,COMP,1,-1
PNGR,ORIENT,HORIZ
PNGR,COLOR,2
PNGR,TMOD,1
/GFILE,600,
!*
/CMAP,_TEMPCMAP_,CMP,,SAVE
/RGB,INDEX,100,100,100,0
/RGB,INDEX,0,0,0,15
/REPLOT
/CMAP,_TEMPCMAP_,CMP
/DELETE,_TEMPCMAP_,CMP
/SHOW,CLOSE
/DEVICE,VECTOR,0
```

path_sx.plt

```
/NOPR
/RESET
/DEVICE,VECT,OFF
! General Graphics Settings
/NUM,  1
/PLOP,INFO, 3
/TRIAD,RTOP
/GTHIC,CURV,  2
/GROPT,CGRI,ON
/GROPT,CURL,  1
/PNUM,TYPE, 1
/COL, NUM ,YGRE, 3
/TRLCY,ON
/TXTRE,ON
! Window Settings
/VIEW,1,  0.0000    ,  0.0000    ,  1.0000
/FOC, 1,  215.91    ,  816.78    , 0.50000
/DIST,1,  420.20
/TYPE,1, 6
/EDG, 1, 0,  45.000
/CONT,1,  9,AUTO
/GO
```